



Instruments for Electrical Safety Compliance Testing



Experts In Electrical Safety Compliance.®

Hipot • Ground Bond • Insulation Resistance • Leakage Current • Functional Run
Medical Test Systems • HV/HC Multiplexers • Software Solutions

CUSTOMER HAPPINESS PROMISE

We aim to provide an amazing experience and quality testers that last a long time. If you're not satisfied with your tester, return it within 45 days for a full refund. Calibrate annually with us, or one of our authorized partners, and we'll extend your warranty an additional year for the service life of your tester, and at least five years after discontinuation. If it breaks during that time, we promise to fix it for free (unless abuse or excessive damage is present). When your tester reaches the end of its service life, we'll responsibly recycle it and give you a discount on a replacement.

*Annual calibration and inspection must be made in each successive year starting one year after the original purchase date in order to remain eligible for extended warranty coverage beyond the standard warranty period (five years).



5 YEAR WARRANTY

Your new tester is warranted to be free from defects in workmanship and material for a period of (5) years from date of shipment.

**5 year warranty is valid on any model purchased in 2021 or after.



ONGOING SUPPORT

We work to provide the best service and support in the industry. With decades of industry experience we are the pros you can trust to help you be compliant to NRTL standards. We'll work closely with you to help you achieve your goals. We've built a worldwide network of knowledgeable partners, so you're covered no matter where you are.



A HISTORY OF INNOVATION

1936

Associated Research was founded.

1939

We introduced the first battery operated Megohmmeter, the Vibrotest, in the United States.

1966

We commenced the first Cable Testing/Fault Location school known as ARU. ARU continued for over 25 years.

1993

We introduced the first complete family of microprocessor-controlled electrical safety instruments.

1995

We developed the first multi-function electrical safety compliance analyzer.

1997

We released the first electrical safety instrument with a built-in multiplexer for multi-point testing.

1999

We introduced Autoware, the first software package for automated instrument control, in the EST industry.

2001

We released our patented safety feature, SmartGFI®, to provide our customers with maximum operator protection during high voltage testing.

2012

We launched the first electrical safety compliance analyzer with a built-in AC power source.

2013

We developed the first mobile app in the electrical safety testing industry.

2017

We launched the Applications Consulting program.

2020

We Introduced Withstand®, a Software as a Service (SaaS) platform, that is a cloud storage of your tests and data in one platform.

2021

Associated Research joins the IKONIX family to become and IKONIX Brand.

2023

Ikonix globalizes it's product portfolio.

FOCUSED ON EDUCATION

With over 80 years of industry experience, we have the resources and expertise to assist you with your educational needs throughout the life of your product.

- Quick Start Videos
 - Quick Start Guides
- On-Site Training
 - White Papers & Articles

SERVING THE COMMUNITY



We donate a portion of our profits to raising awareness about the dangers of electricity.

PRODUCT REFERENCE CHART



AC Hipot



DC Hipot



Ground Bond



Ground Continuity



Insulation Resistance



Leakage Current



Functional Run



Built-in AC Power

Hypot®

3805	•			•	
3855	•			•	•
3865	•	•		•	
3870	•	•		•	•

HypotULTRA®

7800	500 VA	•		•	•
7804	•	•	•	•	•
7820	•			•	
7850	•	•		•	•
7854	500 VA	•	•	•	•

OMNIA® II

8204	•	•	•	•	•		
8254	500 VA	•	•	•	•		
8206	•	•	•	•	•	•	•
8256	500 VA	•	•	•	•	•	•
8207	•	•	•	•	•	•	•
8257	500 VA	•	•	•	•	•	•

HYAMP®

3240	•
------	---

HypotMAX®

7705	•
7710	•
7715	•
7720	•

LINECHEK® II

620L	•	•
------	---	---

SC6540

HN
HH
HG
GN
GG



USB



RS-232



Ethernet



GPIB

Internal
MultiplexerModular
MultiplexerWithStand
CompatiblePower Source
Recommended**Hypot®**

3805	•	Opt.					•
3855	•	Opt.					•
3865	•	Opt.					•
3870	•	Opt.					•

HypotULTRA®

7800	•	•	Opt.	Opt.		•	•
7804	•	•	Opt.	Opt.		•	•
7820	•	•	Opt.	Opt.	•	•	•
7850	•	•	Opt.	Opt.	•	•	•
7854	•	•	Opt.	Opt.		•	•

OMNIA® II

8204	•	•	Opt.	Opt.	•	•	•
8254	•	•	Opt.	Opt.	•	•	•
8206	•	•	Opt.	Opt.		•	•
8256	•	•	Opt.	Opt.		•	•
8207	•	•	Opt.	Opt.		•	•
8257	•	•	Opt.	Opt.		•	•

HYAMP®

3240	•						•
------	---	--	--	--	--	--	---

HypotMAX®

7705	•	•		Opt.			•
7710	•	•		Opt.			•
7715	•	•		Opt.			•
7720	•	•		Opt.			•

LINECHEK® II

620L	•	•	Opt.	Opt.		•	•
------	---	---	------	------	--	---	---

SC6540

HN					•	•	
HH					•	•	
HG					•	•	
GN					•	•	
GG					•	•	

MedTEST is the most comprehensive Electrical Safety Compliance test system in the industry designed exclusively for medical applications. Customize it to meet your specific medical safety testing needs in order to comply with standards such as UL60601, IEC60601-1, EN60601-1, UL2601, and IEC601-1. See page 22 for more details.

Hypot®

Production Line Hipot Testing
at its Finest



Our Hypot® Series raises the bar for production line Hipot testing. Improve traceability with onboard data storage and easily transfer test result data and test settings via convenient front panel USB. Take the guesswork out of your production line with the direct barcode connection to quickly associate products with pre-programmed test files. We've included advanced features like improved security and a touch screen interface that provides custom pop-up prompts displayed before each test step. We've dramatically reduced the weight and footprint of the Hypot® Series to make safety compliance a less strenuous ordeal. Quickly interconnect with the HYAMP® Series to form a complete safety compliance system.



Find the Model that Fits Your Testing Needs



AC Hipot



DC Hipot



Ground
Continuity



Insulation
Resistance

EN 50191
COMPLIANT

	AC Hipot	DC Hipot	Ground Continuity	Insulation Resistance	EN 50191 COMPLIANT
3805	•		•		•
3855	•		•	•	•
3865	•	•	•		•
3870	•	•	•	•	•

AVAILABLE INTERFACES



USB



RS-232
(Optional)

SAFETY & PRODUCTIVITY FEATURES



SmartGFI®
Automatic
operator shock
protection



**Remote Safety
Interlock**
Easily disable
HV output



Data Transfer
Easily import/
export test
files and data
via USB



**Barcode
Capability**
Direct barcode
connection



**Multiple
Languages**
Multi-
Language user
interface



PLC Remote
Basic PLC
relay control



**Prompt &
Hold**
Provides alerts
& instructions
between tests



**Advanced
User Security**
Customize ID
& password
protection



Interconnection
Interconnect with
HYAMP® to form
a complete test
system



Ramp-HI®
Reduce ramp
time during
DC Hipot



Charge-LO®
Confirms
proper DUT
connection



FailCHECK™
Confirms
failure
detection



**Accredited
Cal**
Accredited
calibration
options
available



WithStand®
Automation
Software



**On Board Data
Storage**
Save up to
1,500 Test
Results on-
board

INPUT SPECIFICATIONS				
Voltage	100 – 120 VAC / 200 – 240 VAC ± 10% Auto Range			
Frequency	50/60 Hz ± 5%			
Fuse	3.15 A, Fast Blow 250 VAC			
DIELECTRIC WITHSTAND TEST MODE				
Output Rating	3805/3855/ 3865/3870	5 kV @ 20 mAAC 6 kV @ 7.5 mADC (3865/3870 only)		
Maximum Limit	3805/3855/ 3865/3870	AC	Range: Resolution:	0.00 – 20.00 mA 0.01 mA
		DC	Range: Resolution: Accuracy:	0 – 7500 µA 1 µA AC and DC ± (2% of setting + 2 counts)
Minimum Limit	3805/3855/ 3865/3870	AC	Range: Resolution:	0.000 – 9.999 mA 0.001 mA
		DC	Range: Resolution: Accuracy:	0.0 – 999.9 µA 0.1µA AC and DC ± (2% of setting + 2 counts)
Arc Detection	Range:	1 – 9 (9 is most sensitive)		
Ground Fault Interrupt	GFI Trip Current: 450 µA max (AC or DC), Fixed			
	HV Shut Down Speed: < 1 msec			
Current Display	3805/3855/ 3865/3870	AC	Range 1: Range 2:	0.000 – 4.000 mA 3.50 – 20.00 mA
		DC	Range 1: Range 2: Range 3:	0.0 µA – 400.0 µA 0.350 mA – 4.000 mA 3.50 mA – 7.50 mA
			Accuracy:	
DC Output Ripple	≤ 5% Ripple rms at 6 kVDC @ 7.5 mA Resistive Load			
RAMP-HI Selectable	Range: 0.0 – 7,500 µA, User Selectable			
Charge-LO	0 – 350 µA DC or Auto Set			
Discharge Time	< 50 msec for no load, < 100 msec for capacitive load The maximum capacitive load vs. output voltage: 1µF < 1KV 0.08µF < 4KV 0.75µF < 2KV 0.04µF < 5KV 0.5µF < 3KV 0.015µF < 6KV			
AC Voltage Waveform/ Frequency	Sine Wave, Crest Factor = 1.3 – 1.5			
	Range:	50 or 60 Hz, User Selectable		
Dwell Timer	Range:	AC 0, 0.2-999.9 sec (0=Continuous) DC 0, 0.4-999.9 sec (0=Continuous)		
Ramp Timer	Range:	Ramp-Up: 0.1 – 999.9 sec Ramp-Down: AC 0.0 – 999.9 sec DC 0, 1.0 – 999.9 sec, (0=OFF)		
Ground Continuity Current	DC 0.1A ± 0.01 A, fixed			
Ground Continuity Maximum Limit Minimum Limit	Range: Resolution: Accuracy:	0.00 – 1.50 Ω 0.01 Ω ± (3% of setting + 0.02 Ω)		
	Range: Resolution: Accuracy:	0.00 – 0.50 Ω 0.01 Ω ± (3% of setting + 0.02 Ω)		

INSULATION RESISTANCE TEST MODE				
Voltage Setting	Range: Resolution: Accuracy:	30 – 1,000 VDC 1 V ± (1.5% of setting + 5 V)		
Resistance Display	Range:	1 – 50,000 MΩ		
	Resolution:			
	30 – 99 VDC MΩ	100 – 499 VDC MΩ	500 – 1000 VDC MΩ	
	0.001	1.000 – 1.999	1.000 – 1.999	1.000 – 9.999
	0.01	2.00 – 19.99	2.00 – 19.99	10.00 – 99.99
	0.1	20.0 – 199.9	20.0 – 199.9	100.0 – 999.9
	1	200 – 10,000	200 – 20,000	1000 – 50000
	Accuracy:	± (8% of reading+2 counts) at test voltage 30 – 499 V and 1.00–999.9 MΩ		
	At test voltage 500-1000 V ± (2% of reading + 2 counts) for 1.00 – 999.9 MΩ ± (5% of reading + 2 counts) for 1000 – 9999 MΩ ± (15% of reading + 2 counts) for 10000 – 50,000 MΩ			
HI & LO-Limit	Range: Resolution:	0, 1.00 – 99.99 MΩ (0=OFF, HI-Limit ONLY) 0.01 MΩ 1000-50000 1 MΩ		
	Range: Resolution:	100.0 – 999.9 MΩ 0.1 MΩ		
	Accuracy:	At test voltage 500-1000 V ± (2% of setting + 2 counts) for 1.00 – 999.9 MΩ ± (5% of setting + 2 counts) for 1000 – 9999 MΩ ± (15% of setting + 2 counts) for 10000 – 50,000 MΩ		
Charge-LO	Range:	0.000 – 3.500 µA DC or Auto Set		
Ramp Timer	Range:	Ramp-Up: 0.1 – 999.9 sec Ramp-Down: 0, 1.0 – 999.9 sec, (0=OFF)		
Delay Timer	Range:	0.5 – 999.9 sec (0=OFF)		
Dwell Timer	Range:	0, 0.5 – 999.9 sec (0=continuous)		
GENERAL SPECIFICATIONS				
Remote Control and Signal I/O	Inputs: Test, Reset, Hardware Interlock, File Recall Outputs: Pass, Fail, Test-in-Process, Reset-Out, Start-Out			
Vmax	Displays the maximum voltage value recorded during a breakdown			
Imax	Displays the maximum leakage current value read during a test			
Memories	50 steps 1500 test results			
Interface	USB standard			
Language	English, Traditional Chinese, Simplified Chinese, Turkish, Portuguese, Spanish, German, French			
Security	Multiple user setups with ID and password			
Dimensions (W x H x D)	3805/3855/ 3865/3870	8.5" x 3.5" x 11.9" (215 mm x 88.1 mm x 300 mm)		
Weight	3805/3855/ 3865/3870	12 lbs (5.46 kgs)		

For reading specifications, please refer to the user manual.

Why We Use Counts

Associated Research publishes some specifications using "counts" which allows us to provide a better indication of the instrument's capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.

Specifications subject to change without notice.

HypotULTRA®

The Most Flexible and Feature-Rich Automated Dielectric Analyzer Available



Our HypotULTRA® models provide all the tools you need to modernize your production line with best-in-class 4-in-1 test capability and a slim 2U design. We've added 40A AC Ground Bond test capability to HypotULTRA's already impressive feature list for manufacturers that aim to adopt best testing practices without sacrificing productivity. Whether you're looking to improve traceability with onboard data storage, increase efficiency with our intuitive touch screen interface and direct barcode scanner connection, or automate with a variety of communication interfaces, HypotULTRA was designed to take your production line to the next level.



Find the Model that Fits Your Testing Needs




EN 50191 COMPLIANT


	AC Hipot	DC Hipot	40A Ground Bond	Ground Continuity	Insulation Resistance
7800	500 VA*	•		•	•
7804	•	•	•	•	•
7820	•			•	•
7850	•	•		•	•
7854	500 VA*	•	•	•	•

*Meets 200 mA short circuit requirements

AVAILABLE INTERFACES

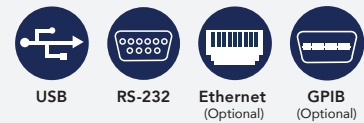

SAFETY & PRODUCTIVITY FEATURES

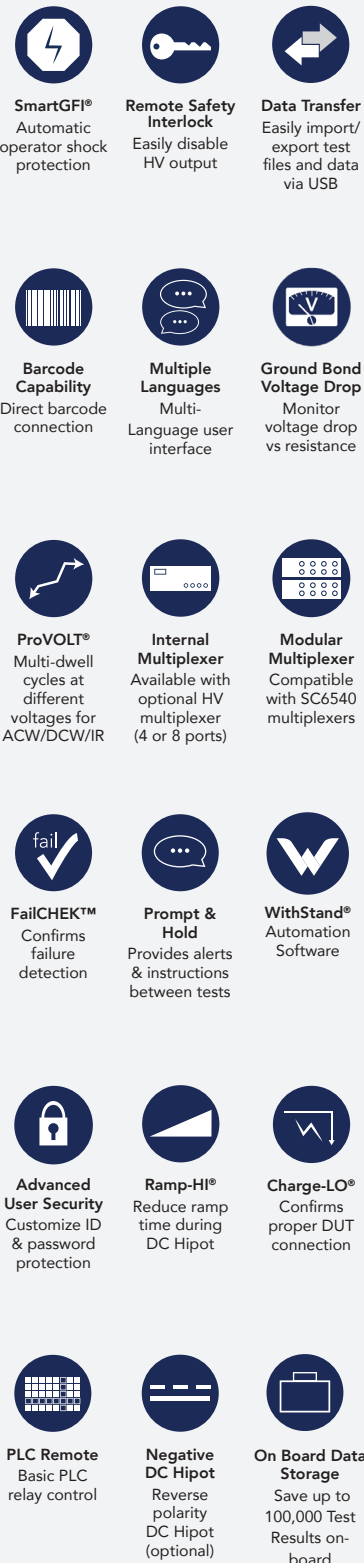

INPUT SPECIFICATIONS			
Voltage	100 – 120 VAC / 200 – 240 VAC ± 10% Auto Range		
Frequency	50/60 Hz ± 5%		
Fuse	7804/7820/7850:	6.3A, Slow Blow 250 VAC	
	7800/7854:	15A, Fast Blow 250 VAC	
AC WITHSTAND TEST MODE (All Models)			
Output Voltage	Range: Resolution: Accuracy:	0 – 5,000 VAC 1 VAC ± (1.5% of setting + 5V)	
Output Frequency	50/60 Hz ± 0.1%, User Selection		
Output Waveform	Sine Wave, Crest Factor = 1.3 – 1.5		
Output Regulation	± (1% of output + 5V)		
HI and LO-Limit Total	Total	Range: Resolution: Range: Resolution: Accuracy:	0.000 – 9.999 mA 0.001 mA 10.00 – 40.00 mA (10 – 99.99 mA, Models 7800/7854) 0.01 mA ± (2% of setting + 2 counts) 7804/7820/7850 ± (2% of setting + 6 counts) 7800/7854
	Real	Range: Resolution: Range: Resolution: Accuracy:	0.000 – 9.999 mA 0.001 mA 10.00 – 40.00 mA (10 – 99.99 mA 7800/7854) 0.01 mA ± (3% of setting + 50 µA)
Ramp Up Timer Ramp Down Timer Dwell Timer	Range: Range: Range:	0.1 – 999.9 sec 0.0 – 999.9 sec 0, 0.2 – 999.9 sec (0=Continuous)	
Ground Continuity	Current: DC 0.1A ± 0.01A, fixed		
Current	Max. Ground Resistance: 1.0 Ω ± 0.1 Ω		
Arc Detection	Range:	1 – 9 (9 is most sensitive)	
DC WITHSTAND TEST MODE (Models 7800/7804/7850 & 7854 Only)			
Output Voltage	Range: Resolution: Accuracy:	0 – 6000 VDC 1 V ± (1.5% of setting + 5 V)	
DC Output Ripple	<4% (6 KV/10 mA at Resistive Load)		
HI and LO-Limit	Range: Resolution: Accuracy:	0.0000 – 0.9999 µA 0.0001 µA ± (2% of setting + 10 counts), Low Range is ON	
	Range: Resolution: Accuracy:	1.000 – 9.999 µA 0.001 µA ± (2% of setting + 10 counts), Low Range is ON	
	Range: Resolution: Accuracy:	10.00 – 99.99 µA 0.01 µA ± (2% of setting + 10 counts), Low Range is ON	
	Range: Resolution: Accuracy:	100.0 – 999.9 µA 0.1 µA ± (2% of setting + 2 counts)	
	Range: Resolution: Accuracy:	1,000 – 20,000 µA range (7804/54) 1,000 – 10,000µA range (7800/50) 1 µA ± (2% of setting + 2 counts)	
Ramp Up Timer	Range:	0.4 - 999.9 sec, Low Range is OFF 0.5 – 999.9 sec, Low Range is ON	
Ramp Down Timer	Range:	0.0, 1.0 – 999.9 sec (0=OFF)	
Dwell Timer	Range:	0, 0.4 – 999.9 sec (0=Continuous) 0, 1.0 – 999.9 sec, Low Range is ON	
Ramp-HI Selectable	Range:	0 – 20 mA selectable	
Charge-LO	Range:	0.0 – 350.0 µA DC or Auto Set	
Discharge Time	< 50 ms for no load, < 100 ms for capacitive load		
Maximum Capacitive Load DC Mode	1µF < 1kV 0.75 µF < 2 kV 0.5 µF < 3 kV	0.0 µF < 4 kV 0.04 µF < 5 kV 0.015 µF < 6 kV	
Arc Detection	Range:	1 – 9 (9 is most sensitive)	
INSULATION RESISTANCE MODE (Models 7800/7804/7850 & 7854 Only)			
Output Voltage, DC	Range: Resolution: Accuracy:	10 – 1,000 VDC 1 VDC ± (1.5% of setting + 2 counts)	
	Range: Resolution: Accuracy:	1,001 – 6,000 VDC 1 VDC ± (1.5% of setting + 5 V)	

INSULATION RESISTANCE MODE (Models 7800/7804/7850 & 7854 Only)			
Charging Current HI and LO-Limit	Maximum > 20 mA peak		
	Range: Resolution: Accuracy:	0.10 MΩ – 99.9 MΩ (HI-Limit: 0=OFF) 0.01 MΩ ± (2% of setting + 2 counts)	
	Range: Resolution: Accuracy:	100.0 MΩ – 999.9 MΩ 0.1 MΩ 1,000 – 9,999 ± (5% of setting + 2 counts)	
	Range: Resolution: Accuracy:	1,000 MΩ – 50,000 MΩ 1 MΩ 10,000 – 50,000 ± (15% of setting + 2 counts)	
Ramp Up Timer	Range:	0.1 – 999.9 sec	
Ramp Down Timer	Range:	1.0 – 999.9 sec	
Dwell Timer	Range:	0.5 – 999.9 sec (0=Continuous)	
Delay Timer	Range:	0.5 – 999.9 sec	
Charge-LO	0.000 – 3.500 µA or Auto Set		
CONTINUITY TEST MODE (All Models)			
Output Current, DC	1 A for 0.000 – 1,000 Ω, 0.1 A for 1.01 – 10.00 Ω 0.01 A for 10.01 – 100 Ω, 0.001 A for 101 – 1,000 Ω 0.0001 A for 1001 – 10,000 Ω, 1 A is Max		
Resistance Display Max & Min Lmt	Range: Resolution: Accuracy:	0.000 – 1,000 Ω 0.001 Ω ± (1% of setting + 3 counts)	
	Range: Resolution: Accuracy:	1.01 – 10.00 Ω 0.01 Ω ± (1% of setting + 3 counts)	
	Range: Resolution: Accuracy:	10.1 – 100.0 Ω 0.1 Ω ± (1% of setting + 3 counts)	
	Range: Resolution: Accuracy:	101 – 1,000 Ω 1 Ω ± (1% of setting + 3 counts)	
	Range: Resolution: Accuracy:	1,001 – 10,000 Ω 1 Ω ± (1% of setting + 10 counts)	
Dwell Timer	Range:	0, 0.4 – 999.9 sec (0=Continuous)	
Resistance Offset	Range:	0.000 – 10.00 Ω	
GROUND BOND TEST MODE (Models 7804 & 7854 Only)			
Output Voltage (Open Circuit Voltage)	Range: Resolution: Accuracy:	3.00 – 8.00 VAC 0.01 VAC ± (2% of setting + 3 counts) Open Circuit	
Output Current	Range: Resolution: Accuracy:	1.00 – 40.00 A 0.01 A ± (2% of setting + 2 counts)	
Maximum Loading	1.00 – 10.00 A, 0 – 600 mΩ 10.01 – 30.00 A, 0 – 200 mΩ 30.01 – 40.00 A, 0 – 150 mΩ		
HI and LO-Limit	Range: Resolution: Accuracy:	0 – 150 mΩ for 30.01 – 40.00 A 0 – 200 mΩ for 10.01 – 30.00 A 0 – 600 mΩ for 1.00 – 10.00 A 1 mΩ ± (2% of setting + 2 counts)	
	Range: Resolution: Accuracy:	0 – 600 mΩ 1 mΩ ± (3% of setting + 3 counts)	
Dwell Timer	Range:	0, 0.5 – 999.9 sec (0=Continuous)	
Milliohm Offset	0 – 200 mΩ		
Voltage Offset	0.0 - 6.0 V		
GENERAL SPECIFICATIONS			
Memory	2,000 steps, 200 steps per test file max 100,000 test results		
Mechanical	Bench or rackmount (2U height) with feet		
Interface	Standard: USB, RS-232 Optional: GPIB (IEEE-488.2), Ethernet		
SmartGFI®	0, 0.4 – 5.0 mA (0=OFF)		
Dimensions (W x H x D)	16.92" x 3.50" x 15.75" (430 x 88.1 x 400mm)		
Weight	7800:	45 lbs (20.4 kg)	
	7804:	46.3 lbs (21 kg)	
	7820:	35 lbs (15.9 kg)	
	7850:	35 lbs (15.9 kg)	
	7854:	46.3 lbs (21 kg)	


For reading specifications, please refer to the user manual.
Specifications subject to change without notice.

OMNIA® II

The Most Advanced Electrical Safety Compliance Analyzer in the Industry



Our OMNIA® II Series is a complete line of multi-function electrical safety compliance analyzers designed to satisfy even the most demanding application requirements. We've included exclusive productivity-enhancing features and the latest in safety technology to make this product line the envy of the industry. With 6 models to choose from, a multi-language menu system and a variety of automation interfaces available, the OMNIA® II is ready for global deployment.

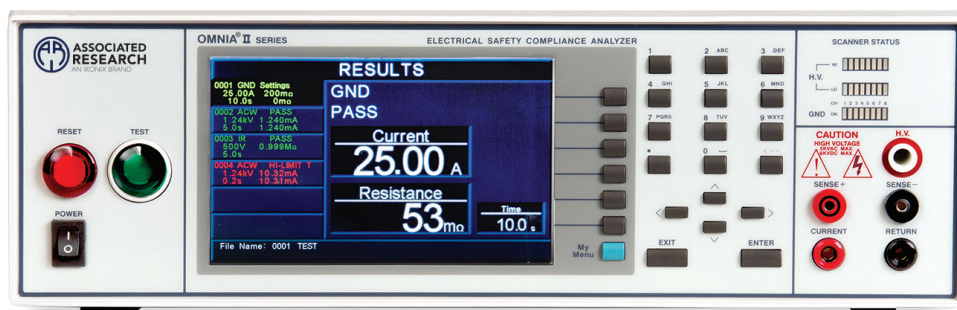


Find the Model that Fits Your Testing Needs




Model	AC Hipot	DC Hipot	Ground Bond	Ground Continuity	Insulation Resistance	Leakage Current	Functional Run	Built-in AC Power	Power Source Recommended
8204	•	•	•	•	•	•	•	•	•
8254	500 VA*	•	•	•	•	•	•	•	•
8206	•	•	•	•	•	•	•	•	•
8256	500 VA*	•	•	•	•	•	•	•	•
8207	•	•	•	•	•	•	•	•	•
8257	500 VA*	•	•	•	•	•	•	•	•

*Meets 200 mA short circuit requirements

AVAILABLE INTERFACES

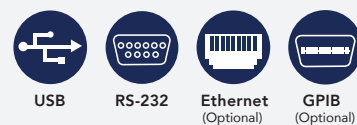

SAFETY & PRODUCTIVITY FEATURES

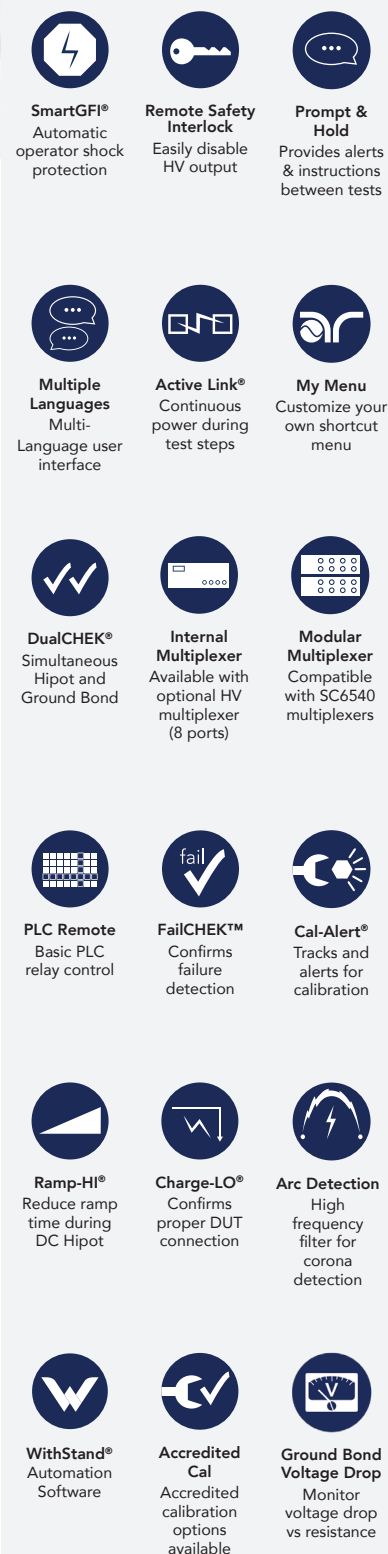

INPUT SPECIFICATIONS			
Voltage	115/230 V Auto Range, ± 15 % Variation		
Frequency	50/60 Hz ± 5%		
Fuse	115 VAC, 230 VAC – 10 A Slow Blow 250 VAC		
DIELECTRIC WITHSTAND TEST MODE			
Output Rating	5 kV @ 50 mAAC 5 kV @ 100 mAAC (Models 825X) 6 kV @ 20 mADC		
Voltage Setting	Resolution: Accuracy:	1 V ± (1.5% of setting + 5 volts)	
HI and LO-Limit	AC Total	Range: Resolution:	0.000 – 9.999 mA 0.001 mA
		Range: Resolution:	10.00 – 50.00 mA (100.00 mA, models 825X) 0.01 mA
		Accuracy:	± (2% of setting + 2 counts)
	AC Real	Range: Resolution:	0.000 – 9.999 mA 0.001 mA
		Range: Resolution:	10.00 – 50.00 mA (100.00 mA, models 825X) 0.01 mA
		Accuracy:	± (3% of setting + 50 µA)
	DC	Range: Resolution:	0 – 999.9 µA 0.1 µA
		Range: Resolution:	1,000 – 20,000 µA 1 µA
		Accuracy:	± (2% of setting + 2 counts)
Arc Detection	Range:	1 – 9 (9 is most sensitive)	
Ground Continuity	Current: DC 0.1 A ± 0.01 A, fixed Max. Ground Resistance: 1 Ω ± 0.1 Ω, fixed		
Ground Fault Interrupt	GFI Trip Current: 0.4 mA – 5.0 mA (AC or DC) HV Shut Down Speed: < 1 ms		
DC Output Ripple	≤ 4% Ripple rms at 5 kVDC at 20 mA Resistive Load		
Discharge Time	≤ 50 ms No Load, < 100 ms for Capacitive Load		
Max Capacitive Load, DC Mode	1 µF < 1 kV 0.08 µF < 4 kV 0.75 µF < 2 kV 0.04 µF < 6 kV 0.5 µF < 3 kV		
AC Output Waveform	Sine Wave, Crest Factor = 1.3 – 1.5		
Output Frequency	Range:	60 or 50 Hz, User Selection (400/800 Hz optional)	
Output Regulation	± (1% of output + 5 V) from no load to full load and over input voltage range		
Dwell Timer	Range: Range:	AC 0.4 – 999.9 sec (0=Continuous) DC 0.3 – 999.9 sec (0=Continuous)	
Ramp Timer	Ramp-up: Ramp-Down:	AC 0.1 – 999.9 sec, DC 0.4 – 999.9 sec AC 0.0 – 999.9 sec, DC 0.0 , 1.0 – 999.9 sec (0=Continuous)	
INSULATION RESISTANCE TEST MODE			
Voltage Setting	Range:	30 – 6000 VDC	
HI and LO-Limit	Range: Resolution:	0.05 MΩ – 99.99 MΩ 0.01 MΩ	
	Range: Resolution:	100.0 MΩ – 999.9 MΩ 0.1 MΩ	
	Range: Resolution:	1,000 MΩ – 50,000 MΩ 1 MΩ (HI-Limit: 0=OFF)	
Ramp Timer	Ramp-up: Ramp-Down:	0.1 – 999.9 sec 0.0, 1.0 – 999.9 sec (0=Continuous)	
Delay Timer	Range:	0.5 – 999.9 sec (0=Continuous)	

GROUND BOND TEST MODE		
Output Voltage (Open Circuit Limit)	Range:	3.00 – 8.00 VAC
Output Frequency	Range:	60 or 50 Hz, User Selectable
Output Current	Range: Resolution: Accuracy:	1.00 – 40.00 A 0.01 A $\pm (2\% \text{ of setting} + 0.02 \text{ A})$
Maximum Loading	1.00 – 10.00 A, 0 – 600 m Ω 10.01 – 30.00 A, 0 – 200 m Ω 30.01 – 40.00 A, 0 – 150 m Ω	
HI and LO-Limit	Range:	0 – 150 m Ω for 30.01 – 40.00 A 0 – 200 m Ω for 10.01 – 30.00 A 0 – 600 m Ω for 1.00 – 10.00 A
	Resolution: Accuracy:	1 m Ω $\pm (2\% \text{ of reading} + 2 \text{ m}\Omega)$
	Range: Resolution: Accuracy:	0 – 600 m Ω for 1.00 – 5.99 A 1 m Ω $\pm (3\% \text{ of reading} + 3 \text{ m}\Omega)$
Dwell Timer	Range:	0.5 – 999.9 sec (0=Continuous)
Milliohm Offset	Range:	0 – 200 m Ω
CONTINUITY TEST MODE		
Output Current	DC 0.01 A ± 0.00001 A	
Resistance Display	Range:	0.00 – 10000 Ω
HI and LO-Limit	Range: Resolution:	1: 0.00 – 10.00 Ω 0.01 Ω
	Range 2: Resolution:	10.1 – 100.0 Ω 0.1 Ω
	Range 3: Resolution: Accuracy:	101 – 1,000 Ω 1 Ω $\pm (1\% \text{ of reading} + 3 \text{ counts})$
	Range 4: Resolution: Accuracy:	1,001 – 10,000 Ω 1 Ω $\pm (1\% \text{ of reading} + 10 \text{ counts})$ (Max Limit: 0=OFF)
Dwell Timer	Range:	0.0, 0.3 – 999.9 sec (0=Continuous)
Milliohm Offset	Range:	0.00 – 10.00 Ω
RUN TEST MODE (Models 82X6 & 82X7 only)		
DUT Power	Voltage: Current: Range: Resolution: Accuracy:	0 – 277 VAC single phase unbalanced 16 AAC max continuous 0.0 – 277.0 VAC Full Scale 0.1 V $\pm (1.5\% \text{ of reading} + 0.2 \text{ V})$, 30.0 – 277.0 VAC Short Circuit Protection: 23 AAC, Response Time < 3 sec
Delay Time Setting	Range:	0.2 – 999.9 seconds
Dwell Time Setting	Range:	0.1 – 999.9 seconds (0=Continuous)

OMNIA® II Series

RUN TEST MODE CONTINUED (Models 82X6 & 82X7 only)			
Trip Point Settings & Metering	Voltage		
	Volt-Hi Volt-LO	Range: Resolution: Accuracy:	30.0 – 277.0 VAC 0.1 V ± (1.5% of setting + 0.2 V), 30.0–277 VAC
	Current		
	Amp-HI Amp-LO	Range: Resolution: Accuracy:	0.0 – 16.00 AAC 0.01 A ± (2.0% of setting + 2 counts)
	Watts		
	Power-HI Power-LO	Range: Resolution: Accuracy:	0 – 4,500 W 1 W ± (5.0% of setting + 3 counts)
	Power Factor		
	PF-HI PF-LO	Range: Resolution: Accuracy:	0.000 – 1.000 0.001 ± (8% of setting + 2 counts)
	Leakage Current		
	Leak-HI Leak-LO	Range: Resolution: Accuracy:	0.00 – 10.00 mA (0=OFF) 0.01 mA ± (2% of setting + 2 counts)
Timer Display	Range: Resolution: Accuracy:	0.0 – 999.9 seconds 0.1 second ± (0.1% of reading + 0.05 seconds)	
LEAKAGE CURRENT TEST MODE (Models 82X6 & 82X7 only)			
DUT Power	Voltage: Current:	0 – 277 VAC 16 AAC max continuous	
	Voltage Display	Range: Resolution: Accuracy:	0.0 – 277.0 VAC Full Scale 0.1 V ± (1.5% of reading +0.2 V), 30.0 – 277.0 VAC
	Short Circuit Protection:	23 AAC, Response Time < 3 s	
Reverse Power Switch	Reverse polarity switch setting select ON/OFF/AUTO ON: Reverse power OFF: Normal AUTO: Automatic Reverse Polarity		
Neutral Switch	ON/OFF selection for single fault condition		
Ground Switch	ON/OFF selection for Class I single fault condition		
Probe Setting	Surface to Surface (PH – PL) Surface to Line (PH – L) Ground to Line (G – L)		
Touch Current High Limit (rms)	Range: Resolution:	0.0 µA ~ 999.9 µA 1000 µA ~ 10.00 mA 0.1 µA / 1 µA / 0.01 mA	

LEAKAGE CURRENT TEST MODE CONTINUED (Models 82X6 & 82X7 only)			
Touch Current Display (rms)	Range 1:	0.0 µA ~ 32.0 µA, frequency DC, 15 Hz – 1 MHz	
	Range 2:	28.0 µA ~ 130.0 µA, frequency DC, 15 Hz – 1 MHz	
	Range 3:	120.0 µA ~ 550.0 µA, frequency DC, 15 Hz – 1 MHz	
	Resolution for Ranges 1, 2, 3:	0.1 µA	
	Accuracy for Ranges 1, 2, 3:	DC: 15 Hz < f <100 KHz: ± (2% of reading + 3 counts) 100 KHz < f < 1 MHZ: ± 5% of reading (10.0 µA – 999.9 µA)	
	Range 4:	400 µA ~ 2100 µA, frequency DC, 15 Hz – 1 MHz	
	Range 5:	800 µA ~ 8500 µA, frequency DC, 15 Hz – 1 MHz	
	Resolution for Ranges 4 & 5:	1 µA	
	Accuracy for Ranges 4 & 5:	DC: 15 Hz < f <100 KHz: ± (2% of reading + 3 counts) 100 KHz < f < 1 MHZ: ± 5% of reading (10 µA – 8500 µA)	
	Range 6:	8.00 mA ~ 10.00 mA, frequency DC 15 Hz – 100 kHz	
Resolution:	0.01 mA		
Accuracy:	DC: 15 Hz < f < 100 KHz: ± 5% of reading (0.01 mA -10.00 mA)		
Touch Current Display (Peak)	Range 1:	0.0 µA ~ 32.0 µA, frequency DC – 1 MHz	
	Range 2:	28.0 µA ~ 130.0 µA, frequency DC – 1 MHz	
	Range 3:	120.0 µA ~ 550.0 µA, frequency DC – 1 MHz	
	Resolution for Ranges 1, 2, 3:	0.1 µA	
	Accuracy for Ranges 1, 2, 3:	DC: ± (2% of reading + 2 µA) 15 Hz < f < 1 MHz: ± 10% of reading + 2 µA	
	Range 4:	400 µA ~ 2100 µA, frequency DC – 1 MHz	
	Range 5:	1800 A ~ 8500 µA, frequency DC – 1 MHz	
	Resolution for Ranges 4 & 5:	1 µA	
	Accuracy for Ranges 4 & 5:	DC: ± (2% of reading + 2 µA) 15 Hz < f < 1 MHz: ±(10% of reading + 2 µA)	
	Range 6:	8.0 mA ~10.00 mA, frequency DC – 100 KHz	
Resolution:	0.01 mA		
Accuracy:	DC: ± (2% of reading + 3 counts) 15 Hz < f < 100 KHz: ± (10% of reading + 2 counts)		
MD Circuit Module	MD1: UL544NP, UL484 , UL923, UL471, UL867, UL697 MD2: UL544P MD3: IEC 60601-1 MD4: UL1563 MD5: IEC60990 Fig4 U2, IEC62368-1, IEC60335-1, IEC60598-1, IEC60065, IEC61010 MD6: IEC60990 Fig5 U3, IEC60598-1 MD7: IEC62368-1, IEC61010-1 FigA.2 (2K ohm) for Run function MD8: IEC60990/IEC62368-1 Fig4 U1		
	External MD	Basic measuring element 1 kΩ	
	Scope Output Interface	BNC type connector on rear panel for Oscilloscope connection	

AC POWER SOURCE (82X7 only)		
Output	Power:	630 VA and 500 W Maximum
	Voltage:	0 – 150.0 V / 0 – 277.0 V
	Current:	4.20 A maximum for 0 – 150 V range 2.10 A maximum 0 – 277 V range
	Distortion:	≤ 1% at 45- 500 Hz and output voltage within the 80 ~ 140 VAC at Low Range or the 160 ~ 277 VAC at High Range (Resistive Load)
	Regulation:	≤ 0.5% + 5 V (resistive load), from no load to full load and Low Line to High Line (combined regulation)
	Crest Factor:	> 3
	Test Timing:	< 350 ms at start and between
	Limit:	Steps when internal AC source is ON
Settings	Voltage	Low Range: 0.0 – 150.0 V
		High Range: 0.0 – 277.0 V
		Resolution: 0.1 V
		Accuracy: ± (1.5% of setting + 2 counts)
	Frequency	Range: 45.0 Hz – 99.9 Hz Resolution: 0.1 Hz Accuracy: ± 0.1% of setting
		Range: 100 Hz – 500 Hz Resolution: 1 Hz Accuracy: ± 0.1% of setting
		A-HI-Limit Range: 4.20 A / 2.10 A Resolution: 0.01 A Accuracy: ± (2% of reading + 2 counts)
Measurement	Voltage	Range: 0.0 – 277.0 V Resolution: 0.1 V Accuracy: ± (1.5% of reading + 2 counts)
	Current	Range: 0.00 – 16.00 A Resolution: 0.01 A Accuracy: ± (2% of reading + 2 counts)
	Power	Range: 0 – 4500 Resolution: 1 Accuracy: ± (5% of reading + 3 counts) for PF > 0.100
	Power Factor	Range: 0.000 – 1.000 Resolution: 0.001 Accuracy: ± (8% of reading + 5 counts)
	Frequency:	Range: 45 – 500 Hz Resolution: 0.1 Hz Accuracy: ± 0.1 Hz

GENERAL SPECIFICATIONS

PLC Remote Control	Input: Test, Reset, Interlock, Recall File 1 through 3 Output: Pass, Fail, Test-in-Process	
Safety	Built-in SmartGFI circuit	
Memory	10,000 Steps	
Interface	Standard: USB/RS-232 Optional: Ethernet or GPIB	
Security	Advanced security system with access levels and username/password requirements	
Dimensions (W x H x D)	16.93" x 5.24" x 19.69" (430 x 133 x 500 mm)	
Weight	8204/8254:	92 lbs (42 kg)
	8206/8207:	103 lbs (47 kg)
	8256/8257:	103 lbs (47 kg)

For reading specifications, please refer to the user manual.

Why We Use Counts

Associated Research publishes some specifications using "counts" which allows us to provide a better indication of the instrument's capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.

The default of the Adapter Box accessory come in L-N polarity. N-L polarity is available upon request.

Specifications subject to change without notice.

HYAMP®

The Industry Leading Production Line Ground Bond Instrument



Our HYAMP® Series provides manufacturers with data-driven results and greater test flexibility required in today's complex test environment. Quickly collect test data and test settings from the convenient front panel USB port onto a standard USB flash drive. Use the front panel barcode connection to associate products with preprogrammed test files. Test with greater flexibility by performing either AC Ground Bond or DC Ground Bond at a maximum of 40 A of current. The HYAMP® features a drastically reduced weight and footprint making it the ideal lightweight Ground Bond solution for laboratory and production line testing applications. Easily interconnect with the Hypot® Series to form a complete safety compliance system.



Find the Model that Fits Your Testing Needs



Ground Bond

3240

AC/DC

AVAILABLE INTERFACES



USB

SAFETY & PRODUCTIVITY FEATURES



PLC Remote
Basic PLC relay control



Remote Safety Interlock
Easily disable HV output



Data Transfer
Easily import/export test files and data via USB



Barcode Capability
Direct barcode connection



Multiple Languages
Multi-Language user interface



Ground Bond Voltage Drop
Monitor voltage drop vs resistance



FailCHECK™
Confirms failure detection



Prompt & Hold
Provides alerts & instructions between tests



Advanced User Security
Customize ID & password protection



Accredited Cal
Accredited calibration options available



4-Wire Measurement
More accurate milliohm measurement



Interconnection
Interconnect with Hypot® to form a complete test system



On Board Data Storage
Save up to 1,500 Test Results on-board



WithStand® Automation Software

INPUT SPECIFICATIONS		
Voltage	100 – 120 VAC / 200 – 240 VAC \pm 10% Auto Range	
Frequency	50/60Hz \pm 5%	
Fuse	10 A, Slow Blow 250 VAC	
GROUND BOND TEST MODE		
Output Voltage (Open Circuit Voltage)	Range: Resolution: Accuracy:	3.00 – 8.00 VAC/DC 0.01 VAC/DC \pm (3% of setting + 3 counts)
Output Frequency	50 or 60 Hz, User Selectable/DC	
Output Current	Range: Resolution: Accuracy:	0 – 150 m Ω for 30.01 – 40.00 A 0 – 200 m Ω for 10.01 – 30.00 A 0 – 600 m Ω for 1.00 – 10.00 A 0.1 A \pm (3% of setting + 3 counts)
Maximum Loading	Range: Resolution: Accuracy:	1.00 – 10.00 A, 0 – 600 m Ω 10.01 – 30.00 A, 0 – 200 m Ω 30.01 – 40.00 A, 0 – 150 m Ω 1 m Ω \pm (2% of setting + 2 counts)
HI and LO-Limit Resistance	Range: Resolution: Accuracy:	0 – 150 m Ω for 30.01 – 40.00 A 0 – 200 m Ω for 10.01 – 30.00 A 0 – 600 m Ω for 1.00 – 10.00 A 1 m Ω \pm (2% of setting + 2 counts)
HI and LO-Limit Voltage	Range: Resolution: Accuracy:	0.00 – 6.00 V 0.01 \pm (2% of settings + 2 counts)
Dwell Time Setting	Range:	0, 0.5 – 999.9 sec (0=Continuous)
Ω Offset Capability	Range: Resolution: Accuracy:	0 – 100 m Ω 1 m Ω \pm (2% of setting + 2 counts)
V Offset Capability	Range: Resolution: Accuracy:	0.00 – 4.00 V 0.01 V \pm (2% of setting + 2 counts)
Current Display	Range: Resolution: Accuracy:	0.00 – 40.00 AAC/DC 0.01 AC/DC \pm (3% of reading + 1 count)
Voltage Display	Range: Resolution: Accuracy:	0.00 – 8.00 VAC/DC 0.01 AC/DC \pm (2% of reading + 2 counts)
Ohmmeter Display	Range: Resolution: Accuracy:	0 – 600 m Ω for 1.00 – 5.99 A 1 m Ω \pm (3% of reading + 3 counts)
	Range: Resolution: Accuracy:	0 – 600 m Ω for 6 – 40 A 1 m Ω \pm (2% of reading + 2 counts)

GENERAL SPECIFICATIONS	
Remote Control and Signal I/O	The following input and output signals are provided through two 9 pin D type connectors: Inputs: Test, Reset, Hardware Interlock, File Recall Outputs: Pass, Fail, Test-in-Process, Reset-Out, Start-Out Hardware Interlock (safety)
Memories	50 steps 1500 test results
Interface	USB standard
Language	English, Traditional Chinese, Simplified Chinese, Turkish, Portuguese, Spanish, German, French
Security	Multiple user setups with ID and password
Dimensions (W x H x D)	8.5" x 3.5" x 11.9" (215 x 88.1 x 300 mm)
Weight	11 lbs (5 kg)

For reading specifications, please refer to the user manual.

Why We Use Counts

Associated Research publishes some specifications using "counts" which allows us to provide a better indication of the instrument's capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.

Specifications subject to change without notice.

HypotMAX[®]

The Safest and Most Reliable Automated High Voltage Hipot Instrument Available



Our HypotMAX[®] Series is a complete line of automated Hipot instruments designed to meet the demanding requirements of high voltage applications. We've included our patented SmartGFI[®] feature for maximum operator safety as well as a variety of advanced features to increase productivity on the production line and in the lab. Set up and run tests with confidence from our intuitive user interface or automate with a PC.



AVAILABLE INTERFACES



USB



RS-232



GPIB
(Optional)

SAFETY & PRODUCTIVITY FEATURES



PLC Remote
Basic PLC
relay control



SmartGFI[®]
Automatic
operator shock
protection



Remote Safety
Interlock
Easily disable
HV output



Arc Detection
High frequency
filter for corona
detection



Ramp-HI[®]
Reduce ramp
time during
DC Hipot



Charge-LO[®]
Confirms
proper DUT
connection



Accredited
Cal
Accredited
calibration
options
available



WithStand[®]
Automation
Software

Find the Model that Fits Your Testing Needs



AC Hipot



DC Hipot

7705	•	
7710		•
7715	•	
7720		•

INPUT SPECIFICATIONS			
Voltage	115/230 VAC ± 10%, Single Phase, User Selection		
Frequency	50/60 Hz ± 5%		
Fuse	6.3 A, 250 V Slow Blow		
DIELECTRIC WITHSTAND TEST MODE			
Output Rating	7705: 7710: 7715: 7720:	10 kV @ 20 mAAC 12 kV @ 10 mADC 20 kV @ 10 mAAC 20 kV @ 5 mADC	
HI-Limit and LO-Limit	7705	Range 1: Resolution: Range 2: Resolution:	0.0 – 9.999 mA 0.001 mA 10.00 – 20.00 mA 0.01 mA
	7710	Range 1: Resolution: Range 2: Resolution:	0.00 – 999.9 µA 0.1 uA 1,000 – 9,999 µA 1 µA
	7715	Range: Resolution:	0.00 – 9.999 mA 0.001 mA
	7720	Range 1: Resolution: Range 2: Resolution:	0.0 – 999.9 µA 0.1 µA 1,000 – 5,000 µA 1 µA/step
	77XX	Accuracy:	± (2% of setting + 2 counts)
DC Ramp HI	7710	13 mA peak maximum, 10 mADC, ON/OFF selectable	
	7720	6.75 mA peak maximum, 5 mADC, ON/OFF selectable	
DC Charge LO	7710/7720	Range:	0.0 – 350 µADC or auto set
Arc Detection	7705	1 – 9 at output voltage < 7.00 kV 1 – 7 at output voltage ≥ 7.00 kV	
	7710/7720	1 – 9	
	7715	1 – 9 at output voltage < 15.00 kV 1 – 7 at output voltage ≥ 15.00 kV	
Voltage Display	7705	Range: Accuracy:	0.00 – 10.00 kV Full scale ± (1.5% of reading + 20 V)
	7710	Range: Accuracy:	0.00 – 12.00 kV Full scale ± (1.5% of reading + 20 V)
	7715/7720	Range: Accuracy:	0.00 – 20.00 kV Full scale ± (1.5% of reading + 20 V)
Current Display	7705	Auto Range Range 1: Range 2:	0.000 – 3.500 mA 3.00 – 20.00 mA
	7710	Auto Range Range 1: Range 2: Range 3:	0.0 – 350.0 µA 300 – 3500 µA 3,000 – 9,999 µA
	7715	Auto Range Range 1: Range 2:	0.000 – 3.500 mA 3.00 – 10.00 mA
	7720	Auto Range Range 1: Range 2:	0.0 – 350.0 µA 300 – 5,000 µA
DC Output Ripple	7710	< 5% Ripple at 12 kV @ 9,999 µA, Resistive Load	
	7720	< 5% Ripple at 20 kV @ 4,999 µA, Resistive Load	
AC Output Waveform	Sine Wave, Crest Factor = 1.3 – 1.5		
Output Frequency	Range:	50/60 Hz, User Selection ± (1% of output + 5 V) from Regulation No load to full load	
Output Regu-lation	± (1% of output + 10 V) from no load to full load		
Discharge Timer	7710	No load < 400 ms	
	7720	No load < 500 ms	
Dwell Timer		Range: AC Range: DC Range:	0, 0.3 – 999.9 sec (0=Continuous) 0, 0.3 – 999.9 sec or min (0=Continuous) 0, 0.4 – 999.9 sec or min (0=Continuous)
Ramp Timer	7705/7715	Range:	0.3 – 999.9 sec
	7710/7720	Range:	0.4 – 999.9 sec
Ground Conti-nuity	Max. Ground Resistance 1 Ω ± 0.1 Ω, fixed		

DIELECTRIC WITHSTAND TEST MODE			
Ground Fault Interrupt		HV Shut Down Speed < 1 ms GFI Trip Current 1 mA max	
GENERAL SPECIFICATIONS			
Memory		50 memories w/ 8 steps per memory	
Mechanical		Tilt-up front feet	
Interface		Standard: USB, RS-232 Optional: GPIB	
Dimensions (W x H x D)		16.93" x 5.24" x 15.75" (430 x 133 x 400 mm)	
Weight		7705:	63.3 lb (28.7kg)
		7710:	63.1 lb (28.6kg)
		7715:	59.4 lb (26.9kg)
		7720:	61.6 lb (27.9 kg)

For reading specifications, please refer to the user manual.

Why We Use Counts
Associated Research publishes some specifications using “counts” which allows us to provide a better indication of the instrument’s capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.


Specifications subject to change without notice.

SC6540

The Patented Multiplexer that Revolutionized Production Line and Laboratory Electrical Safety Compliance Testing



Our patented SC6540 multiplexer pioneered the largest productivity improvement in the electrical safety compliance industry in years. With up to 16 independent high voltage or high current channels in a convenient 2U design, the SC6540 can be customized in 10 different configurations for multi-point Hipot, Ground Bond, Insulation Resistance, and Leakage Current testing. Configure the SC6540 according to your needs, and interface with your OMNIA® II, HypotULTRA® or LINECHECK® II instrument to improve production line throughput or expand lab testing capability. Operate from the front panel of your AR instrument or utilize a variety of automation interfaces for direct PC control.

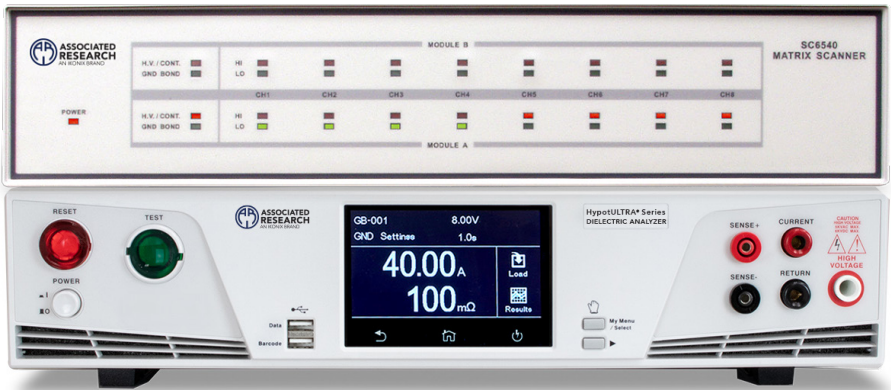

Find the Model that Fits Your Testing Needs



High Voltage



High Current



8 Channel



16 Channel

HN	•		•
HH	•		•
HG	•	•	•
GN		•	•
GG		•	•

Available in both main and secondary configurations

AVAILABLE INTERFACES



USB



RS-232



Ethernet
(Optional)



GPIB
(Optional)

PRODUCTIVITY ENHANCING FEATURES



Interconnection
Interconnect with the HypotULTRA®, OMNIA® II or LINECHECK® II to form a complete test system



WithStand®
Automation Software

FOR USE WITH THE FOLLOWING TESTS



AC Hipot



DC Hipot



Ground Bond



Ground Continuity



Insulation Resistance



Leakage Current

MODULAR MULTIPLEXER SPECIFICATIONS

Input (Main only)	115 VAC (± 10%), 50/60 Hz, single phase 230 VAC (± 10%), 50/60 Hz, single phase User selectable	
Fuse (Main only)	250 V/2 A/fast-blow	
PC Control (Main only)	Standard: USB, RS-232 Optional: Ethernet, GPIB	
Multiplexer Control	Main: One Multiplexer bus output controls, up to 4 additional secondaries Secondary: One output and one input	
Maximum HV Rating	5 kV AC and DC	
Maximum HC Rating	40 A	
Number of Possible Channels	8 or 16	
HV Output	100' reel HV cable rated for up to 30 kV Terminations with 8 HV connectors	
GND Output	20 terminals provided, to accept 10/12 AWG Terminations hook-up wire (user supplied wire)	
Temperature	32° – 104° F (0° – 40° C)	
Humidity	0 – 80%	
Altitude	6,560 ft. (2,000 m)	
Mechanical	2U with tilt-up front feet	
Dimensions (W x H x D)	17" x 4.07" x 12.96" (432 x 103 x 329 mm)	
Weight	Main:	20.05 lbs. max. (9.09 kg) (with 2 high voltage modules)
	Secondary:	15.45 lbs. max. (7.01 kg) (with 2 high voltage modules)

CONFIGURATIONS

The modular design can be customize to fit your application. In addition to main or secondary control, the SC6540 can be set up in the following configurations: 8 or 16 high voltage channels, 8 or 16 high current channels, and 8 high voltage channels and/or 8 high current channels. Refer to the images for details.

The different configurations (shown below) are indicated by the following alpha designators

- M – Main Multiplexer
- H – 8 High Voltage Channels
- HH – 16 High Voltage Channels
- G – 8 Ground Bond Channels
- GG – 16 Ground Bond Channels
- N – Empty Module
- S – Secondary



MODEL SC6540 HNM*
8 Channel High Voltage Multiplexer



MODEL SC6540 HHM*
16 Channel High Voltage Multiplexer



MODEL SC6540 HGM*
8 Channel High Voltage Multiplexer
8 Channel High Current Multiplexer



MODEL SC6540 GNM*
8 Channel High Current Multiplexer



MODEL SC6540 GGM*
16 Channel High Current Multiplexer


*Also available in secondary configuration

LINECHEK® II


The Fully Automated Leakage Current Instrument that Changed the Industry




Our LINECHEK® II model 620L provides 7 measuring devices (MD's) compliant with international certification bodies as well as a convenient switching network to simulate all 8 required fault conditions, everything you need for full Leakage Current compliance. Utilize the intuitive user interface or control via a PC for more advanced automated applications that require data storage and analysis. The 620L handles up to 40 A of continuous current and can be interfaced to an SC6540 modular multiplexer for multi-point testing. Interconnect the 620L to an OMNIA® II instrument to form a complete electrical safety compliance testing system.

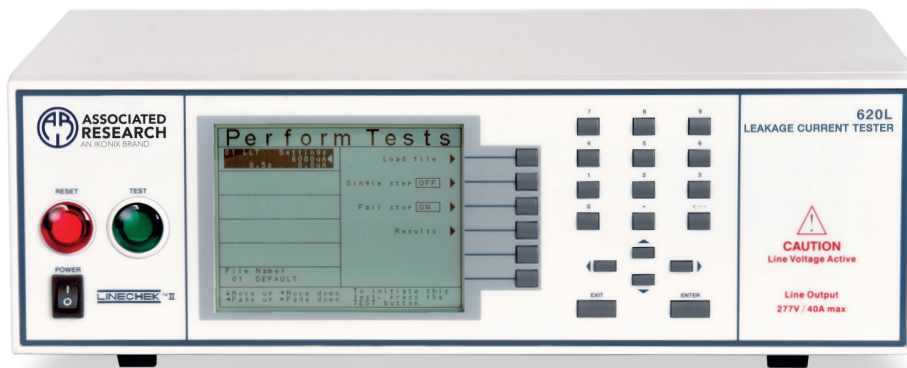

AVAILABLE INTERFACES



SAFETY & PRODUCTIVITY FEATURES

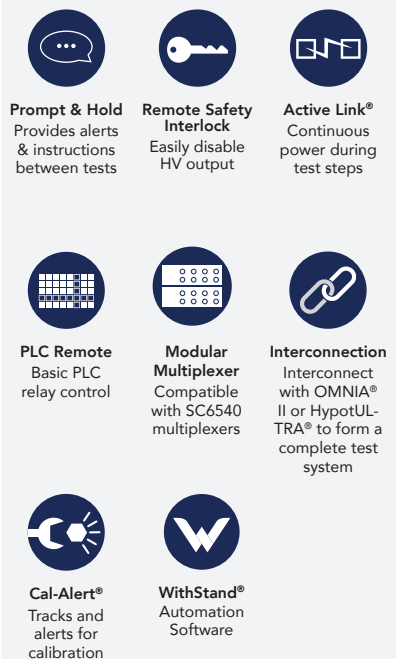

Find the Model that Fits Your Testing Needs



Leakage Current



Functional Run



Power Source Recommended

620L

•

•

•

INPUT SPECIFICATIONS		
Voltage	115/230 VAC ± 10%, User Selection	
Frequency	50/60 Hz ± 5%	
Fuse	2 A Slow Blow 250 VAC	
LINE CONDITIONS		
Reverse Power Switch	Switch for power polarity reversal	
Neutral Switch	Neutral switch on/off selection for single fault	
Ground Switch	Ground switch on/off selection for class I single fault	
PROBE SETTINGS		
Surface to Surface	(PH – PL)	
Surface to Line	(PH – L)	
Ground to Line	(G – L)	
LEAKAGE LIMIT SETTINGS		
Touch Current High/Low Limit (rms)	Range:	0.0 µA – 999.9 µA / 1,000 µA – 9,999 µA / 10.00 mA – 20.00 mA
	Resolution:	0.1 µA / 1 µA / 0.01 mA
Touch Current High/Low Limit (Peak)	Range:	0.0 µA -999.9 µA / 1,000 uA – 9,999 µA / 10.00 mA – 30.00 mA
	Resolution:	0.1 µA / 1 µA / 0.01 mA
DISPLAY		
Touch Current Display (rms)	Range:	0.0 µA – 550 µA, frequency DC, 15 Hz – 1 MHz
	Resolution:	0.1 µA
	Accuracy:	DC: 15 Hz ≤ f ≤ 100 kHz: ± (2% of reading + 3 counts) 100 kHz ≤ f ≤ 1 MHz: ± 5% of reading (10.0 µA – 999.9 µA)
	Range:	400 µA – 8,500 µA, frequency DC, 15 Hz – 1 MHz
	Resolution:	1 µA
	Accuracy:	DC: 15 Hz ≤ f ≤ 100 kHz: ± (2% of reading + 3 counts) 100 kHz ≤ f ≤ 1 MHz: ± 5% of reading, (10.0 µA – 8,500 µA)
	Range:	8.00 mA – 20.00 mA, frequency DC, 15 Hz – 100 KHz
	Resolution:	0.01 mA
	Accuracy:	DC: 15 Hz ≤ f ≤ 100 MHz: ± 5% of reading (0.01 mA – 20.00 mA)
Touch Current Display (peak)	Range:	0.0 µA – 550 µA, frequency DC – 1 MHz
	Resolution:	0.1 µA
	Accuracy:	± (2% of reading + 2 µA) 15 Hz ≤ f ≤ 1 MHz, ± 10% of reading + 2 µA
	Range:	400 µA – 8,500 µA, frequency DC – 1 MHz
	Resolution:	1 µA
	Accuracy:	± (2% of reading + 2 µA) 15 Hz ≤ f ≤ 1 MHz, ± 10% of reading + 2 µA
	Range:	8.00 mA – 30.00 mA, frequency DC – 100 kHz
	Resolution:	0.01 mA
	Accuracy:	± (2% of reading + 3 counts) 15 Hz ≤ f ≤ 100 kHz, ± 10% of reading + 2 counts
MEASURING DEVICE MODULE		
MD1	UL544NP, UL484 , UL923, UL471, UL867, UL697	
MD2	UL544P	
MD3	IEC 60601-1	
MD4	UL1563	
MD5	IEC60990 Fig4 U2, IEC62368-1, IEC60335-1, IEC60598-1,IEC60065, IEC61010	
MD6	IEC60990 Fig5 U3, IEC60598-1	
MD7	IEC62368-1, IEC61010-1 FigA.2 (2 kohm) for Run function	
External MD	Basic measuring element 1 kohm	
MD Voltage Limit	70 VDC	

DUT POWER		
AC Voltage	0.0 – 277.0 V	
AC Current	40 A max continuous	
AC Voltage High/Low Limit	Range: Resolution:	0.0 – 277.0 V 0.1 V/step
AC Voltage Display	Range: Resolution: Accuracy:	0.0 – 277.0 V 0.1 V/step ± (1.5% of reading + 2 counts), 30.0 – 277.0 V
Delay Time Setting	Range: Resolution:	0.5 – 999.9 sec 0.1 sec
Dwell Time Setting	Range: Resolution: Accuracy:	0, 0.5 – 999.9 sec (0=Continuous) 0.1 sec ± (0.1% of reading + 0.05 seconds)
Failure Protection	On Start-Up – Neutral Voltage Check (Neutral – V) Over current and ground current check (Line – OC)	
GENERAL SPECIFICATIONS		
Memory	50 Memories, 30 steps per each memory File locations can link 900 steps max	
Mechanical	Bench or rackmount with tilt-up feet	
Interface	Standard: USB, RS-232 Optional: Ethernet, GPIB	
Dimensions (W x H x D)	16.93" x 5.24" x 11.81" (430 x 133 x 300 mm)	
Weight	26.45 lbs (12 kg)	

For reading specifications, please refer to the user manual.

Why We Use Counts

Associated Research publishes some specifications using “counts” which allows us to provide a better indication of the instrument’s capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.

The default of the Adapter Box accessory come in L-N polarity. N-L polarity is available upon request.

Specifications subject to change without notice.

MedTEST

A Complete Electrical Safety Testing System that Satisfies the Most Demanding Medical Compliance Requirements



Our MedTEST system can be designed to provide a complete test solution for medical device manufacturers in need of conforming to IEC 60601-1 3rd Edition Standard. Customize your MedTEST system to satisfy your individual testing requirements including Hipot, Ground Bond, Insulation Resistance, Functional Run and leakage current testing for all B, BF and CF type applied parts including Mains on Applied Parts (MOAP) tests. Up to 40 A of continuous DUT current combined with our Active Link® technology reduces overall test time and integration with our SC6540 modular multiplexer allows for multi-point sequential testing without the need to change test leads. Get the most from your test system by utilizing our WithStand® software for maximum productivity-enhancing benefits.



Rack cabinet shown in image is for illustration only. Ikonix does not sell or distribute the rack cabinet.



AC Hipot



DC Hipot



Ground Bond



Ground Continuity



Insulation Resistance



Leakage Current



Functional Run



Power Source Recommended

AVAILABLE INTERFACES



USB



RS-232



Ethernet
(Optional)



GPIB
(Optional)

SAFETY & PRODUCTIVITY FEATURES



SmartGFI®
Automatic operator shock protection



Remote Safety Interlock
Easily disable HV output



Prompt & Hold
Provides alerts & instructions between tests



Multiple Languages
Multi-Language user interface



Active Link®
Continuous power during test steps



My Menu
Customize your own shortcut menu



DualCHEK®
Simultaneous Hipot and Ground Bond



Internal Multiplexer
Available with optional HV multiplexer



Modular Multiplexer
Compatible with SC6540 multiplexers



FailCHEK™
Confirms failure detection



Cal-Alert®
Tracks and alerts for calibration



Ramp-HI®
Reduce ramp time during DC Hipot



Charge-LO®
Confirms proper DUT connection



Accredited Cal
Accredited calibration options available



WithStand®
Automation Software

POPULAR MEDTEST CONFIGURATIONS



OMNIA® II 8207 AND SC6540

- All-in-one testing system (Hipot, Ground Bond, Insulation Resistance, and Leakage Current)
- Built in 500 VA AC power source
- Efficient use of rack space
- SC6540 provides automated multi-point testing
Most common applications incorporate 8 or 16 port multiplexers



OMNIA® II 8206, SC6540 AND POWERED BY AN **EEC** AC POWER SOURCE

- All-in-one testing system (Hipot, Ground Bond, Insulation Resistance, and Leakage Current)
- Compatible EEC power source provides power to DUT*
- SC6540 provides automated multi-point testing.
Most common applications incorporate 8 or 16 port multiplexers

*Choose from EEC 8500 Series.



OMNIA® II 8204, 620L, SC6540 AND POWERED BY AN **EEC** AC POWER SOURCE

- All-in-one testing system (Hipot, Ground Bond, Insulation Resistance, and Leakage Current)
- Compatible EEC power source provides power to DUT*
- SC6540 provides automated multi-point testing
Most common applications incorporate 8 or 16 port multiplexers
- Up to 40 A continuous current capability for applications that draw greater than 16 A of current

*Choose from EEC 8500 Series.

LINE CONDITIONS		
Reverse Power Switch	Switch for power polarity reversal	
Neutral Switch	Neutral switch on/off selection for single fault	
Ground Switch	Ground switch on/off selection for class I single fault	
PROBE SETTINGS		
Surface to Surface	(PH – PL)	
Surface to Line	(PH – L)	
Ground to Line	(G – L)	
LEAKAGE LIMIT SETTINGS		
Touch Current High/Low Limit (rms)	Range:	0.0 µA – 999.9 µA / 1,000 µA – 9,999 µA / 10.00 mA – 20.00 mA
	Resolution:	0.1 µA / 1 µA / 0.01 mA
Touch Current High/Low Limit (Peak)	Range:	0.0 µA -999.9 µA / 1,000 uA – 9,999 µA / 10.00 mA – 30.00 mA
	Resolution:	0.1 µA / 1 µA / 0.01 mA
MEASURING DEVICE MODULE		
MD1	UL544NP, UL484 , UL923, UL471, UL867, UL697	
MD2	UL544P	
MD3	IEC 60601-1	
MD4	UL1563	
MD5	IEC60990 Fig4 U2, IEC62368, IEC60335-1, IEC60598-1, IEC60065, IEC61010	
MD6	IEC60990 Fig5 U3, IEC60598-1	
MD7	IEC62368, IEC61010-1 FigA.2 (2 kohm) for Run function	
External MD	Basic measuring element 1 kohm	
MD Voltage Limit	70 VDC	
DUT POWER		
AC Voltage	0.0 – 277.0 V	
AC Current	40 A max continuous	
AC Voltage High/Low Limit	Range:	0.0 – 277.0 V
	Resolution:	0.1 V/step
AC Voltage Display	Range:	0.0 – 277.0 V
	Resolution:	0.1 V/step
	Accuracy:	± (1.5% of reading + 2 counts), 30.0 – 277.0 V
Delay Time Setting	Range:	0.5 – 999.9 sec
	Resolution:	0.1 sec
Dwell Time Setting	Range:	0, 0.5 – 999.9 sec (0=Continuous)
	Resolution:	0.1 sec
	Accuracy:	± (0.1% of reading + 0.05 seconds)
Failure Protection	On Start-Up – Neutral Voltage Check (Neutral – V) Over current and ground current check (Line – OC)	

DIELECTRIC WITHSTAND TEST MODE				
Output Rating*	5 kV @ 50 mAAC 6 kV @ 20 mADC			
Voltage Setting	Range: Resolution: Accuracy:	0 – 5,000 VAC, 0 – 6,000 VDC 1 V ± (1.5% of setting + 5 V)		
HI and LO-Limit	AC Total	Range: Resolution: Accuracy:	0.000-9.999 mA 0.001 mA ± (2% of setting + 2 counts)	
		Range: Resolution: Accuracy:	10.00 – 50.00 mA 0.01 mA ± (2% of Setting + 2 counts)	
		AC Real	Range: Resolution: Accuracy:	0.000 – 9.999 mA 0.001 mA ± (3% of setting + 50 µA)
		Range: Resolution: Accuracy:	10.00 – 50.00 mA 0.01 mA ± (3% of setting + 50 µA)	
		DC	Range: Resolution: Accuracy:	0.00 – 999.9 µA 0.1 µA ± (2% of setting + 2 counts)
			Range: Resolution: Accuracy:	1,000 – 20,000 µA 1 µA ± (2% of setting + 2 counts)
	Ramp HI		> 20 mA peak maximum, ON/OFF selectable	
	Charge LO	Range:	0.000 – 350.0 µA or Auto Set	
DC Output Ripple	≤ 4% Ripple rms at 5 kVDC @ 20 mA, Resistive Load			
Discharge Timer	< 50 msec for no load, < 100 msec for capacitor load (All capacitance values in MAX load spec below)			
Maximum Capacitive Load	1 µF < 1 kV		0.08 µF < 4 kV	
	0.75 µF < 2 kV		0.04 µF < 6 kV	
	0.50 µF < 3 kV			
Output Frequency	50/60 Hz ± 0.1%, User Selection, 400/800 Hz Option			
AC Output Waveform	Sine Wave, Crest Factor = 1.3 – 1.5			
Output Regulation	± (1% of output + 5 V) from no load to full load and over input voltage range			
Dwell Timer	AC 0, 0.4 – 999.9 sec (0=Continuous) DC 0, 0.3 – 999.9 sec (0=Continuous)			
Ramp Timer	Ramp-Up AC: 0.1 – 999.9 Ramp-Down AC: 0.0-999.9 Ramp-Up DC: 0.4 – 999.9 Ramp-Down DC: 0.0, 1.0-999.9			
Ground Continuity	Current: DC 0.1 A ± 0.01 A, fixed Max. Ground Resistance: 1 Ω ± 0.1 Ω, fixed			
Ground Fault Interrupt	GFI Trip Current: 5.0 mA max HV Shut Down Speed: < 1 ms			

*Output voltage limited to 3.5 kV with 620L option 03

CONTINUITY TEST MODE		
Output Current	DC 0.1 A \pm 0.00001 A	
Resistance Display	Range:	0.00 – 10,000.00 Ω
HI and LO-Limit	0.00 – 10,000 Ω	
Dwell Timer	Range:	0.0, 0.3 – 999.9 sec (0=Continuous)
Milliohm Offset	Range:	0.00 – 10.00 Ω
GROUND BOND TEST MODE		
Output Voltage	Range:	3.00 – 8.00 VAC
Output Frequency	50/60 Hz \pm 0.1%, User Selection	
Output Current	Range: Resolution: Accuracy:	1.00 – 40.00 A 0.01 A \pm (2 % of setting + 2 counts)
Output Regulation	\pm (1% of output + 0.02 A) Within maximum load limits, and over input voltage range	
Maximum Loading	1.00 – 10.00 A, 0 – 600 m Ω 10.01 – 30.00 A, 0 – 200 m Ω 30.01 – 40.00 A, 0 – 150 m Ω	
HI and LO-Limit	Range:	0 – 150 for 30.01 – 40.00 A
	Range:	0 – 200 for 10.01 – 30.00 A
	Range:	0 – 600 for 6.00 – 10.00 A
	Range:	0 – 600 for 5.99 – 1.00 A
	Resolution:	1 m Ω
	Accuracy:	6.00 – 40.00 A, \pm (2% of setting + 2 Counts) 1.00 – 5.99 A, \pm (3% of setting + 3 Counts)
Milliohm Offset	Range:	0 – 200 m Ω
INSULATION RESISTANCE TEST MODE		
Output Voltage	Range:	30 – 1,000 VDC
Charging Current	Maximum > 20 mA peak	
HI and LO-Limit	Range: Resolution:	0.05-99.99 M Ω 0.01 M Ω
	Range: Resolution:	100.0 – 999.9 M Ω 0.1 M Ω
	Range: Resolution:	1000 – 50,000 M Ω 1 M Ω
Charge-LO	0.000 – 3.500 μ A or Auto Set	
Ramp Timer	Ramp Up:	0.1 – 999.9 secs
	Ramp Down:	0.0, 1.0 – 999.9 secs
Dwell Timer	0, 0.5 – 999.9 (0=Continuous)	
Delay Timer	0.5 – 999.9 secs	
Ground Fault Interrupt	GFI Trip Current: 5.0 mA max HV Shut down Speed: < 1 ms	

GENERAL SPECIFICATIONS	
Interface	Standard: USB, RS-232 Optional: Ethernet, GPIB
Safety	Built-in SmartGFI® circuit
Memory	620L: 50 memories, 30 steps per memory OMNIA® II: 10,000 steps
AC POWER SOURCE	
AC Power Source	Up-to 6 kVA compatible power sources available
Configuration	AC Power Source configuration depends on application. MedTEST hardware is configured for testing products with one side of the supply mains at earth potential (Fig 10 UL60601-1). MedTEST hardware is configured for unbalanced 0-277 V DUT input power. Custom Configurations available. Contact us for details.

For reading specifications, please refer to the user manual.

Why We Use Counts

Associated Research publishes some specifications using “counts” which allows us to provide a better indication of the instrument’s capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.










Specifications subject to change without notice.

SYSTEMS

Production Line Electrical Safety Compliance in a Convenient Stackable or Rackable Configuration




Interconnect our Hypot® Series Hipot Instrument with our HYAMP® Series Ground Bond instrument to form a complete safety compliance system. Easily operate both instruments from a single point of control on the production line or in a rack. All test systems are safety agency listed, include interconnect cables, and detailed directions on effortlessly interconnecting your system.

	Hypot® 3805	Hypot® 3855	Hypot® 3865	Hypot® 3870
	 AC Hipot	  AC Hipot Insulation Resistance	  AC Hipot DC Hipot	   AC Hipot DC Hipot Insulation Resistance
HYAMP® 3240  Ground Bond	System 32-05	System 32-55	System 32-65	System 32-70

SETTING UP A SAFE WORKSTATION

Setting up a safe and secure workstation is one of the best ways to protect your test operators. You can setup test stations with or without direct protection depending on your requirements.

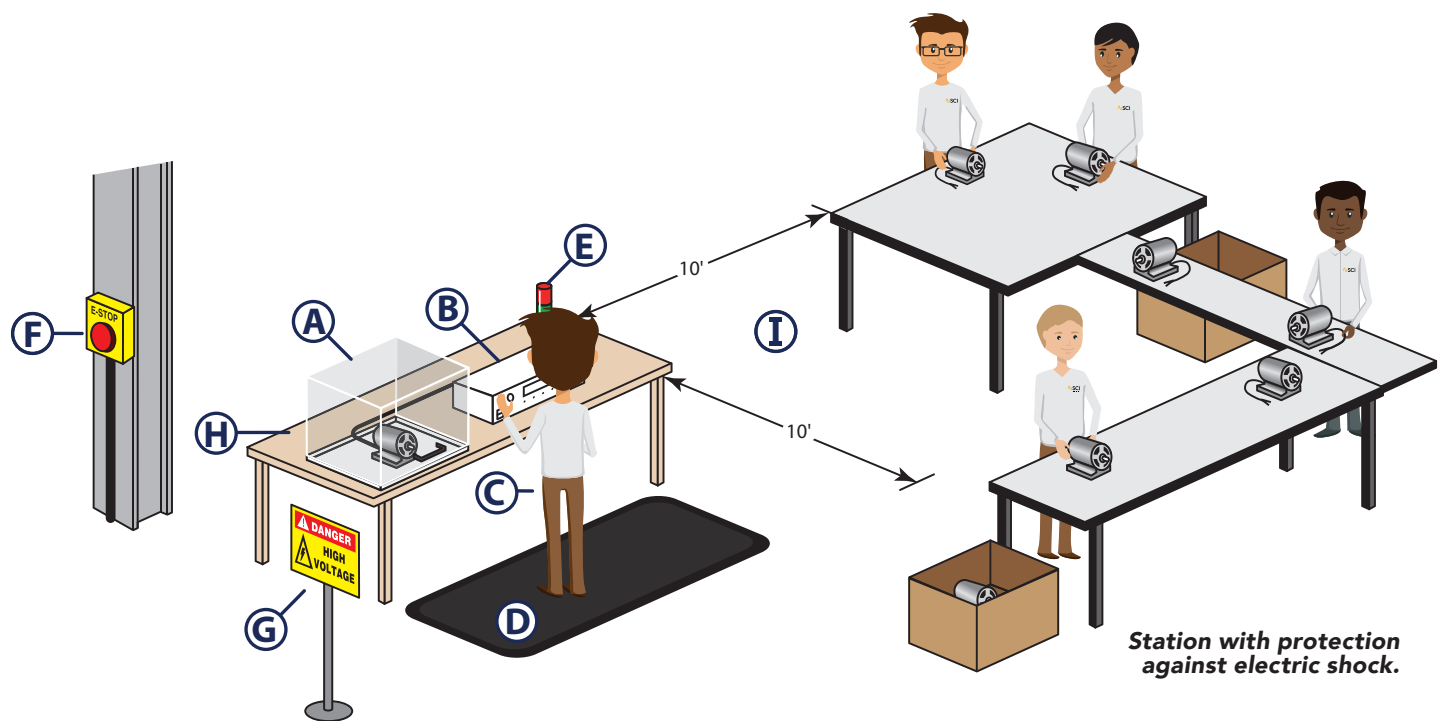

Description	
A	DUT Safety Enclosure - This is wired to the Hipot tester's Remote Safety Interlock. This protects you from touching the DUT while a test is in progress. When you open the enclosure door, it will immediately disable the instrument's high voltage output.
B	Hipot Tester – Performs test on the DUT
C	Test Operator
D	High Voltage Insulation Mat – This isolates you from ground which provides an additional means of protection when operating high voltage equipment.
E	Signal Tower Light – Gives an indication as to the status of the testing area. A green light indicates the Hipot instrument is not outputting high voltage and the test area is safe. A red light indicates that the Hipot instrument is active and to stay clear of the test area.
F	Emergency Stop Button – An E-stop button is located on the perimeter of the test area. In the event of an emergency, someone outside the test area can hit the E-Stop button to immediately cut off power to the entire test station.
G	Warning Signs – Mark the testing area with clearly posted signs that read: DANGER-HIGH VOLTAGE TEST AREA. AUTHORIZED PERSONNEL ONLY.
H	Non-Conductive Work Bench – Only use a work bench made of non-conductive material such as plastic or wood. This ensures no stray leakage current could flow through you during a test.
I	NEC (National Electric Code) and NFPA (National Fire Protection Agency) stipulate that any unqualified workers shall not come within 10 feet of an EXPOSED energized circuit.

ESSENTIAL WORKSTATION PPE & ACCESSORIES

Class 3 Insulation Mat 40396

Thickness:
3/8" (9.53 mm)

Dimensions:
3' x 3' (91.44 x 91.44 cm)



High Voltage Warning Sign 39538



DUT Enclosure Wood Frame with Foam Interior 39067

Protect your operator from electric shock by enclosing your DUT. Our enclosures automatically disable the instrument's output when the enclosure door is opened. Our DUT Enclosures are designed to protect the operator from electric shock during testing. Interface an enclosure with our Remote Safety Interlock feature to automatically disable the instrument's output when the enclosure door is opened.

Outside dimensions (W x D x H): 24" x 19" x 11.5" (610 x 483 x 293 mm)

Inside dimensions (W x D x H): 20" x 16" x 10" (508 x 407 x 254 mm)


3/4" Walls, 3/4" Flame Retardant Foam, 1/4" Plexiglass cover



Dual Palm Remote Switch

DPR-01

Prevent your operator from touching a DUT as their hands must stay on the test switches to continue to run a test.

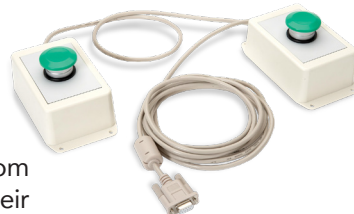

Remote Test Box w/LED Indicators

RTB-02

Helps maintain a safe distance between the operator and test instrument when starting and restarting a test. Compatible with all models except SC6540.



E-Stop ESTOP

Immediately stop the flow of electric current to your instrument when the E-Stop is triggered. The E-Stop provides the safest and fastest way for a rescuer to save an operator from injury.



Test Verification Box TVB-2

The TVB-2 is a go/no-go daily test verification box designed to ensure that the failure detectors of an Associated Research electrical safety testing instrument are functioning properly. We designed the TVB-2 to verify Hipot, Insulation Resistance, Ground Bond, and Ground Continuity test functionality. If you perform daily verifications on your testing equipment, then the TVB-2 is an ideal solution. An accessory cord is available to customers who prefer to verify their test instrument using an adapter box.



TVB-2 Accessory Cord 39514

Accessory line cord for the TVB-2 allows convenient connection to a standard adapter box.



Leakage Current Verification Box LVB-2

Verify the failure detectors of your Associated Research Leakage Current Test instrument are functioning properly with this go/no-go load box.



Signal Tower Light 24V 40417

Our Signal tower light gives operators a visual indication of the status of the testing area. A green light indicates the Hipot tester is not outputting high voltage and the test area is safe. A red light indicates that the Hipot tester is active and to stay clear of the test area. Compatible with OMNIA® II Series, HypotULTRA® Series, Hypot® Series, HYAMP® Series, HypotMAX® Series, and LINECHECK II (620L).



Magnetic Hipot Return Cable CBLSR-05M



2 Wire 40A Ground Bond Probe 38539



4 Wire 40A Ground Bond Probe 38538

High Voltage Pistol Probe with Switch
38814



High Voltage Probe 38081

Return Probe 38082



COMMON SAFETY STANDARD REFERENCE CHART

Standard/ Harmonized Standard	Testing Type	Dielectric Withstand			Ground Bond/Continuity				
		Test Voltage	Max I.	Test Time	Test Current	V Limit	Max. R	Test Time	
IEC/UL 60601-1 3rd Edition Medical Electrical Equipment	Performance	500 – 4000 VAC or 707 – 5656 VDC	No Breakdown	60 s	10-25 A	≤ 6 V	≤ 0.1 Ω	5 s	
	Production*	1000 – 3000 VAC		1 or 60 s	10-25 A	≤ 6 V	≤ 0.1 Ω	5 s	
IEC 61730-2 UL 1703 Photovoltaic Modules & Panels	Performance	1000 VAC + 2 x rated V or 2000 VAC + 4 x rated V	50 uA	60 s	2.5 x Max Over Current Protection	≤ 12 V	≤ 0.1 Ω	120 s	
	Production	1000 VAC + 2 x rated V or (1000 VDC + 2 x rated V) X 120%	50 uA	1 or 60 s	Continuity				
IEC 60335-1 Household Electrical Appliances	Performance	500 – 2400 VAC x rated V + 2400 VAC	No Breakdown	60 s	≥ 10 A	≤ 12 V	0.1 – 0.2 Ω	≤ 120 s	
	Production	400 – 2500 VAC	5-30 mA	1 s	≥ 10 A	≤ 12 V	0.1 – 0.2 Ω	No time specified	
UL 60335-1 Household Electrical Appliances	Performance	500V – 2400 VAC x rated V + 2400 VAC	No Breakdown	60 s	40 A	≤ 6.5 V	≤ 0.5 Ω	120 s	
	Production	400 – 2500 VAC	5-30 mA	1 s	40 A	≤ 12 V	0.1 – 0.2 Ω	No time specified	
IEC 60598-1 Luminaires	Performance	500 – 4 x rated V + 2000 VAC	No Breakdown	60 s	≥ 10 A	≤ 12 V	≤ 0.5 Ω	60 s	
	Production	Not Specified – Responsibility of Manufacturer							
UL 1598 Luminaires	Performance	1000 VAC – 1000 VAC x 2 x rated V	No Breakdown	60 s	30 A	≤ 4 V	≤ 0.1 Ω	120 s	
	Production	1200 VAC		1 s	Continuity		≤ 0.1 Ω	Continuity	
IEC/UL 61010-1 & CSA 22.2 No. 61010-1 Laboratory Control Test & Measurement Equipment	Performance	840 – 11940 VAC or 1200 – 7500 VDC	No Breakdown	5 – 60 s	25 or 30 A	≤ 10 V or ≤ 12 V	≤ 0.1 Ω or < 4 V 0.133 Ω	60 or 120 s	
	Production			5 s max ramp up 2 s dwell	Continuity				
EN 60204-1 Electrical Equipment of Machines	Performance	2 x rated V or 1000 VAC	No Breakdown	1 s	0.2 – 10 A	≤ 24 V	Refer to Section 18.2.2	No time specified	
	Production	Not Specified – Responsibility of Manufacturer							
UL 2202 Electric Vehicle Charging System Equipment	Performance	500 VAC or 1000 VAC + 2 x rated V	No Breakdown	60 s	≤ 60 A	≤ 12 V	Continuity	120 – 240 s	
	Production	1000 – 1700 VAC + 3.4 x rated V		60 or 1 s	Continuity				
IEC 61851-1 Electric Vehicle Conductive Charging System	Performance	1200 VAC + rated V or DC Equivalent	No Breakdown	60 s	Continuity				
	Production	Not Specified – Responsibility of Manufacturer							
IEC 62368-1 Audi/Video, Information & Communication Technology Equipment	Performance	1000 – 3000 VAC or 1414 – 4242 VDC	No Breakdown	60 s	≤ 40 A	≤ 12 V	≤ 0.1 Ω	60 s	
	Production			1 – 6 s	Continuity				

*As a result of performing risk analysis, many medical device manufacturers are performing leakage tests as part of 100% production line testing.

	Earth Leakage		Insulation Resistance			Suggested Model	Testing Type	Standard/ Harmonized Standard
	Test Voltage	Max I.	Test Time	V Limit	Min. R	AR Instrument		
	110% x rated V	5-10 mA	N/A			8206, 8207, 8256, 8257 or MedTEST	Performance	IEC/UL 60601-1 3rd Edition Medical Electrical Equipment
	110% x rated V	5-10 mA	N/A			7804 or 7854	Production*	
	Max rated V	10 uA – 1 mA	10 uA – 1 mA	500 VDC or Max rated V	40-400 MΩ	3240, 8206, 8207, 8256, 8257 or MedTEST	Performance	IEC 61730-2 UL 1703 Photovoltaic Modules & Panels
	N/A		N/A			3240, 3870 or 7850	Production	
	1.06 x rated V	0.25 – 5.0 uA	N/A			8256 or 8257	Performance	IEC 60335-1 Household Electrical Appliances
	N/A		N/A			7804	Production	
	1.06 x rated V	0.25 – 5.0 uA	N/A			8256 or 8257	Performance	UL 60335-1 Household Electrical Appliances
	N/A		N/A			7804	Production	
	Rated V	0.5 – 10 mA	60 s	500 VDC	1-4 MΩ	8206, 8207, 8256 or 8257	Performance	IEC 60598-1 Luminaires
	Not Specified – Responsibility of Manufacturer					Hypot® or 7850	Production	
	N/A		No time specified	500 VDC	≥ 2 MΩ	7804 or 7854	Performance	UL 1598 Luminaires
	N/A		N/A			Hypot® or 7850	Production	
	< 300 V	0.5 mA	N/A			8256, 8257 or MedTEST	Performance	IEC/UL 61010-1 & CSA 22.2 No. 61010-1 Laboratory Control Test & Measurement Equipment
	N/A		N/A			3865 or 7850	Production	
	N/A		No time specified	500 V	≥ 1 MΩ	7804 or 7854	Performance	EN 60204-1 Electrical Equipment of Machines
	Not Specified – Responsibility of Manufacturer					Hypot® or 7850	Production	
	Rated V	0.5 – 0.75 mA or 5 mA	N/A			8206, 8207, 8256, 8257 or MedTEST	Performance	UL 2202 Electric Vehicle Charging System Equipment
	N/A		N/A			Hypot® or 7850	Production	
	Touch Current Only		60 s	500 V	≥ 1 MΩ or ≥ 7 MΩ	8206, 8207, 8256, 8257 or MedTEST	Performance	IEC 61851-1 Electric Vehicle Conductive Charging System
	Not Specified – Responsibility of Manufacturer					Hypot® or 7850	Production	
	< 300 V	0.25 – 3.5 mA	60 s	500 V	≥ 2 MΩ	8206, 8207, 8256, 8257 or MedTEST	Performance	IEC 62368-1 Audi/Video, Information & Communication Technology Equipment
	N/A		N/A			Hypot® or 7850	Production	



Ikonix has developed a comprehensive solution that not only provides top-quality, precise instruments but also ensures swift calibration, guaranteeing instrument accuracy and precision throughout its service life. Ikonix's calibration service is available in two types: ISO Calibration and Standard Calibration. We recommend Associated Research, SCI Electric Safety Tester, and EEC AC Power Source be returned annually for calibration and inspection at our A2LA Accredited ISO 17025 Calibration Lab.

Calibration Benefits

Rapid Turnaround: Fast 5-business-day calibration. If the instrument requires repair during the calibration process, the 5-business-day period will restart, covering both repair and calibration.

Cost Saving: Our one-stop service for verification, calibration, and adjustment eliminates the need to send instruments back and forth between the calibration lab and the original manufacturer for recalibration.

Traceability and Accuracy : We provide certification ensuring that calibration, measurements, and adjustments are not only accurate but traceable to a National Institute of Standards and Technology (NIST).

Full-Scope Calibration: Our calibration is conducted based on Associated Research, SCI Electric Safety Tester, and EEC AC Power Source specification scope, ensuring a thorough calibration and adjustment across all measurement ranges, rather than merely calibrating a few basic points.

Extended Warranty: Annual calibration with Ikonix qualifies your Associated Research, EEC, and SCI branded products for an additional year of coverage beyond the original 5-year warranty* through the extended warranty program. This program also extends coverage for 5 years beyond the instrument's discontinuation date.

*APAC-only products come with a 2-year warranty. The extended warranty does not apply to EEC electrical safety testers sold before 2023. For further details, please contact our sales team.

Types of Calibration

ISO Calibration

Accredited calibrations provide measurement data and uncertainty traceable to the NIST. The Ikonix ISO 17025 calibration laboratory is accredited by the A2LA, and its reports are highly recognized internationally, making them vital to multinational companies and export-oriented industries. If an auditor visits your facility, you can present this calibration to them.


Standard Calibration

Standard Calibration is our base calibration type and provides a certificate stating that Associated Research, EEC, and SCI branded products are calibrated using standards traceable to the NIST.




Record, track and store your data with our brand new software as a service.


Compatible with the Associated Research Hypot® Series, Hypot-ULTRA® Series, OMNIA® II Series (including OMNIA models 8206 or 8256 with the eec 8500 Series), HYAMP® Series, HypotMAX® Series, LINECHEK® II, and SC6540. Also compatible with SCI's 290 Series, 260 Series, and 440 Series.

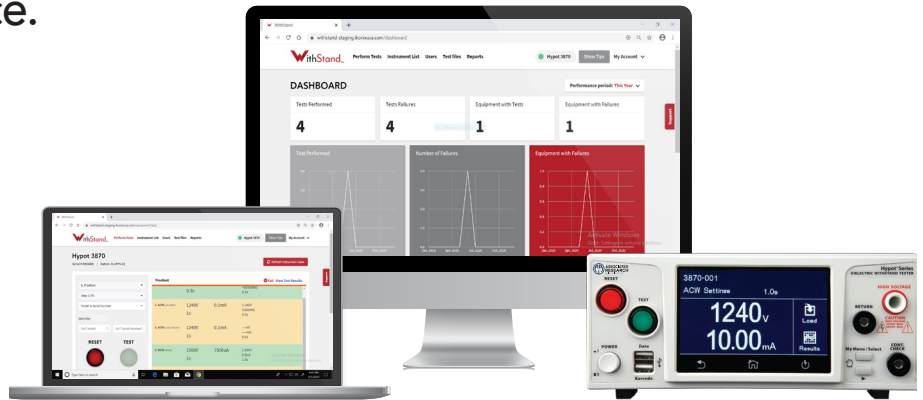

- Unlimited Users
- Remote Instrument Connection
- Barcode Connection
- Multi-language Support
- Intuitive User Interface
- Cloud / Local Storage
- Auto-File Loading

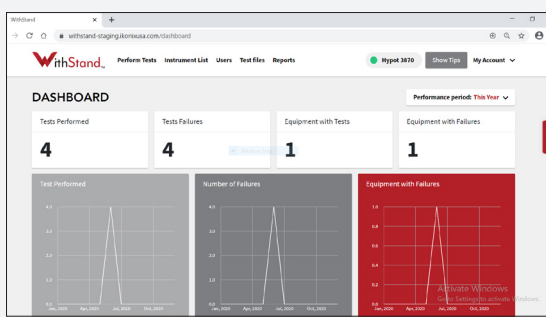

The platform's interface introduces an intuitive user experience making it easy to setup, run tests and view your reports.

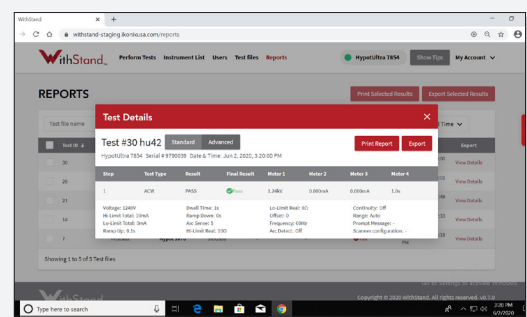

Cloud storage ensures that your tests and data will never be lost or altered – all information is stored immediately to the cloud for access at any time.

► Try it out for yourself with a free 30-day trial withstand.ikonixusa.com/auth/signup/create

APPLICATIONS CONSULTING

Applications Consulting provides customized training tailored to your specific company needs.



OUR CONSULTING PACKAGES

Digital Packages

A web-based learning program. Choose from 2 packages; our Consulting on Demand or Customized Digital Package.

On-site Training Package

1-4 day on-site, hands-on training for your production line or R&D lab.

On-site Validation Package

2 or 4 day on-site training to completely satisfy your organization's validation needs.

*APAC Region Availability: Digital Packages and 1-Day On-site Training Program.

Visit ikonixasia.com/consulting to learn how we can help your team
WE WILL HELP MAKE SURE YOUR SYSTEM IS SAFE AND EFFECTIVE





**ASSOCIATED
RESEARCH**

AN IKONIX BRAND

HEADQUARTERS

28105 N. Keith Drive

Lake Forest, IL 60045 USA

Telephone +1-847-367-4077

Fax +1-847-367-4080

Email info@ikonixusa.com

www.ikonixusa.com

Ikonix Taiwan

12F-2., No.237, Sec. 1, Datong Rd.,

Xizhi Dist., New Taipei City 221, Taiwan

Telephone +886-2-21653066

Fax +886-2-21653077

Email contact@ikonixasia.com

www.ikonixasia.com

Ikonix Asia

Unit D3-5-2 (2ND Floor) Block D3, Dana

1 Commercial Centre, Jalan PJU 1A/46,

47301 Petaling Jaya, Selangor, Malaysia

Telephone +60-3-78429168

Fax +60-3-78426168

Email contact@ikonixasia.com

www.ikonixasia.com



**We Have Local Sales Offices
Throughout the World**

To find your nearest representative
visit us at ikonixasia.com