




# Electrical Safety Compliance Simplified.®

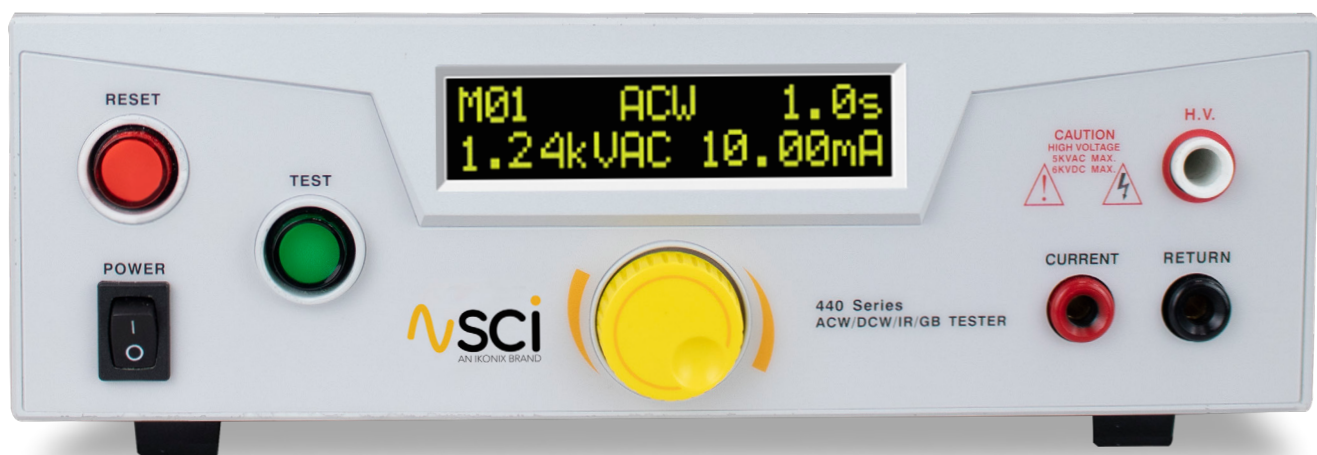

Hipot • Insulation Resistance • Ground Bond • Multi-Function Electrical Safety

We've been providing Customers with the features they have needed for over 60 years. We aim to simplify the Electrical Safety Industry for our Customers by applying this philosophy to everything we do.



All testers come with the accessories you need to run a test right out of the box.

PRODUCT SELECTION GUIDE

|                   | <br>AC Hipot | <br>DC Hipot | <br>Insulation Resistance | <br>Ground Continuity Check | <br>Ground Bond | <br>Frequency Selection | <br>Ramp |
|-------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>440 Series</b> |                                                                                                 |                                                                                                 |                                                                                                              |                                                                                                                |                                                                                                      |                                                                                                              |                                                                                               |
| 446               | •                                                                                               | •                                                                                               | •                                                                                                            |                                                                                                                | 40A                                                                                                  | •                                                                                                            | •                                                                                             |
| 448               | 500VA                                                                                           | •                                                                                               | •                                                                                                            |                                                                                                                | 40A                                                                                                  | •                                                                                                            | •                                                                                             |
| <b>290 Series</b> |                                                                                                 |                                                                                                 |                                                                                                              |                                                                                                                |                                                                                                      |                                                                                                              |                                                                                               |
| 294               |                                                                                                 | •                                                                                               |                                                                                                              | •                                                                                                              |                                                                                                      |                                                                                                              | •                                                                                             |
| 295               | •                                                                                               |                                                                                                 |                                                                                                              | •                                                                                                              |                                                                                                      | •                                                                                                            | •                                                                                             |
| 296               | •                                                                                               | •                                                                                               |                                                                                                              | •                                                                                                              |                                                                                                      | •                                                                                                            | •                                                                                             |
| 297               | •                                                                                               | •                                                                                               | •                                                                                                            | •                                                                                                              |                                                                                                      | •                                                                                                            | •                                                                                             |
| 298               | 500VA                                                                                           |                                                                                                 |                                                                                                              | •                                                                                                              |                                                                                                      | •                                                                                                            | •                                                                                             |
| <b>260 Series</b> |                                                                                                 |                                                                                                 |                                                                                                              |                                                                                                                |                                                                                                      |                                                                                                              |                                                                                               |
| 264               |                                                                                                 |                                                                                                 |                                                                                                              |                                                                                                                | 40A                                                                                                  | •                                                                                                            |                                                                                               |
| 266               |                                                                                                 |                                                                                                 |                                                                                                              |                                                                                                                | 60A                                                                                                  | •                                                                                                            |                                                                                               |

# CUSTOMER HAPPINESS PROMISE

We aim to provide an amazing experience and quality testers that last a long time. If you're not satisfied with your tester, return it within 45 days for a full refund. Calibrate annually with us, or one of our authorized partners, and we'll extend your warranty an additional year for the service life of your tester, and at least five years after discontinuation. If it breaks during that time, we promise to fix it for free (unless abuse or excessive damage is present). When your tester reaches the end of its service life, we'll responsibly recycle it and give you a discount on a replacement.



## 5 YEAR WARRANTY

Your new tester is warranted to be free from defects in workmanship and material for a period of (5) years from date of shipment.


\*\*5 year warranty is valid on any model purchased in 2021 or after.



## ONGOING SUPPORT

We work to provide the best service and support in the industry. With decades of industry experience we are the pros you can trust to help you be compliant to NRTL standards. We'll work closely with you to help you achieve your goals. We've built a worldwide network of knowledgeable partners, so you're covered no matter where you are.



| <br>Dwell | <br>Low Current Sense | <br>Safety Agency Listed | <br>PLC Remote | <br>USB |                   |
|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------------|
|                                                                                              |                                                                                                          |                                                                                                             |                                                                                                   |                                                                                            | <b>440 Series</b> |
| •                                                                                            | •                                                                                                        | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 446               |
| •                                                                                            | •                                                                                                        | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 448               |
|                                                                                              |                                                                                                          |                                                                                                             |                                                                                                   |                                                                                            | <b>290 Series</b> |
| •                                                                                            | •                                                                                                        | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 294               |
| •                                                                                            | •                                                                                                        | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 295               |
| •                                                                                            | •                                                                                                        | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 296               |
| •                                                                                            | •                                                                                                        | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 297               |
| •                                                                                            | •                                                                                                        | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 298               |
|                                                                                              |                                                                                                          |                                                                                                             |                                                                                                   |                                                                                            | <b>260 Series</b> |
| •                                                                                            |                                                                                                          | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 264               |
| •                                                                                            |                                                                                                          | •                                                                                                           | •                                                                                                 | OPT                                                                                        | 266               |

# 440 SERIES

## Hipot / Ground Bond Tester



VERSATILE 4-IN-1  
FUNCTIONALITY

INTUITIVE USER INTERFACE

40A GROUND BOND  
CAPABILITY

20 PROGRAMMABLE  
MEMORIES

EASILY AUTOMATE FOR  
DATA COLLECTION

REMOTE SAFETY  
INTERLOCK

EASILY SAFEGUARD YOUR  
WORKSTATION WITH PPE  
ACCESSORIES

The **440 Series** provides advanced 4-in-1 test capability in a convenient one-box solution. This new series performs AC Hipot (448 - 500 VA), DC Hipot, Insulation Resistance and 40A AC Ground Bond tests while taking up minimal production line space. The **440 Series** is simple and easy-to-use; reducing setup time and increasing production line throughput for your application. With multiple memories and an optional USB port for remote BUS communication so you can quickly perform tests on a variety of DUTs from the front panel or with a PC.

|     | <br>AC Hipot | <br>DC Hipot | <br>Insulation Resistance | <br>Ground Bond |
|-----|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| 446 | •                                                                                               | •                                                                                                 | •                                                                                                              | •                                                                                                    |
| 448 | 500VA                                                                                           | •                                                                                                 | •                                                                                                              | •                                                                                                    |

## RELEVANT APPLICATIONS

|                        |                        |
|------------------------|------------------------|
| APPLIANCE              | CONTRACT MANUFACTURING |
| INDUSTRIAL EQUIPMENT   | LABORATORY EQUIPMENT   |
| INFORMATION TECHNOLOGY |                        |

## WHAT'S IN THE BOX

|             |                                      |
|-------------|--------------------------------------|
| 33189       | Power Cord (10A) 6ft - *446 Model    |
| 38071       | Power Cord (15A) 6ft - *448 Model    |
| 99-10783-01 | Fuse 10A Slow Blow 20mm - *446 Model |
| 99-10168-01 | Fuse 15A Fast Blow 30mm - *448 Model |
| 38075       | Interlock Connector Male             |
| 40428       | Ground Bond Test Lead                |
| 40429       | Ground Bond Return Lead              |
| 04040A-08   | High Voltage Test Lead 6ft           |
| 99-10797-01 | USB A-B 1.8M Cable                   |

All testers come with the accessories you need to run a test right out of the box.

## OPTIONS

| Description  | 446 | 448 |
|--------------|-----|-----|
| Rear Outputs | •   | •   |
| USB Port     | •   | •   |



SCI 448 Model


## SERIES FEATURES




Test Setup Memories



Frequency Selection



Ramp




Dwell




Low Current Sense



Safety Agency Listed



PLC Remote



USB (optional)



On the Go Portability



Intuitive User Interface



# 290 SERIES

## HIPOT TESTERS



5 PROGRAMMABLE  
MEMORIES WITH 10  
OPTIONAL

EASILY AUTOMATE FOR DATA  
COLLECTION

ADVANCED SECURITY  
SETTING

TAMPER-PROOF FRONT  
PANEL CONTROLS

REDUNDANT HARDWARE  
SAFETY INTERLOCK

PORTABLE, RUGGED DESIGN

EASILY SAFEGUARD YOUR  
WORKSTATION WITH PPE  
ACCESSORIES

The **290 Series** is our most popular line of Hipot testers. These testers are designed to simplify every aspect of safety testing for operators of all comfort levels. Our **290 Series** includes the most intuitive user interface in the industry and won't take up too much space on the production line. With multiple memories and an optional USB interface, you can quickly perform tests on a variety of DUTs from the front panel or with a PC. Choose from 5 different models to satisfy your testing requirements.

|     | <br>AC Hipot | <br>DC Hipot | <br>Insulation<br>Resistance | <br>Ground<br>Continuity Check |
|-----|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| 294 |                                                                                                 | •                                                                                                 |                                                                                                                   | •                                                                                                                   |
| 295 | •                                                                                               |                                                                                                   |                                                                                                                   | •                                                                                                                   |
| 296 | •                                                                                               | •                                                                                                 |                                                                                                                   | •                                                                                                                   |
| 297 | •                                                                                               | •                                                                                                 | •                                                                                                                 | •                                                                                                                   |
| 298 | 500VA                                                                                           |                                                                                                   |                                                                                                                   | •                                                                                                                   |

RELEVANT APPLICATIONS

- APPLIANCE
- AC/DC POWERED PRODUCTS
- CABLES & COMPONENTS
- LIGHTING & LED TESTING
- MODULAR HOMES
- MOTORS & PUMPS

WHAT'S IN THE BOX

|           |                                |
|-----------|--------------------------------|
| 02100A-13 | Return Lead 6 ft. (1.8m)       |
| 04040A-08 | High Voltage Lead 6 ft. (1.8m) |
| 33189     | Input Power Cable USA          |
| 38075     | Interlock Connector            |

All testers come with the accessories you need to run a test right out of the box.

OPTIONS


| Description       | 294 | 295 | 296 | 297 | 298 |
|-------------------|-----|-----|-----|-----|-----|
| Rear Outputs      | •   | •   | •   | •   | •   |
| USB Port          | •   | •   | •   | •   | •   |
| 10 Memory         | •   | •   | •   | •   | •   |
| 3mA Current Limit | •   | •   | •   | •   |     |
| Pulse Mode        |     | •   |     |     |     |
| Push to Test Mode |     | •   |     |     |     |



SERIES FEATURES




Test Setup Memories



Frequency Selection



Ramp



Dwell




Low Current Sense



Safety Agency Listed



PLC Remote



USB (optional)



On the Go Portability



Intuitive User Interface



# 260 SERIES

## GROUND BOND TESTERS



5 PROGRAMMABLE  
MEMORIES

EASILY AUTOMATE FOR  
DATA COLLECTION

ADVANCED SECURITY  
SETTINGS

MILLIOHM OFFSET  
FUNCTION FOR ACCURATE  
GROUND BOND TESTING

REDUNDANT HARDWARE  
SAFETY INTERLOCK

PORTABLE, RUGGED DESIGN

EASILY SAFEGUARD YOUR  
WORKSTATION WITH PPE  
ACCESSORIES

Our **260 Series** makes Ground Bond testing simple. Choose between two easy-to-use Ground Bond testers that provide the output current to satisfy NRTL specifications. With an intuitive interface that allows you to set-up a test in seconds and practical security settings, our **260 Series** can easily be deployed in both laboratory and production line environments.

|     | 40A<br><br>Ground<br>Bond | 60A<br><br>Ground<br>Bond |
|-----|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| 264 | •                                                                                                             |                                                                                                                |
| 266 |                                                                                                               | •                                                                                                              |

RELEVANT APPLICATIONS

- APPLIANCE
- INDUSTRIAL EQUIPMENT
- MEDICAL
- LABORATORY EQUIPMENT
- WATER PUMPS

264 WHAT'S IN THE BOX

- 40431 40 Amp High Current Return Lead 6ft. (1.8m)
- 40432 40 Amp High Current Lead 6ft. (1.8m)
- 33189 Input Power Cable USA
- 99-10783-01 Fuse 10 Amp (264 Model)
- 38075 Interlock Connector

266 WHAT'S IN THE BOX

- 40406 60 Amp High Current Lead 6 ft. (1.8m)
- 40405 60 Amp High Current Return Lead 6 ft. (1.8m)
- 38071 Input Power Cable USA
- 40430 Fuse 12 Amp (266 Model)
- 38075 Interlock Connector

All testers come with the accessories you need to run a test right out of the box.

OPTIONS


| Description          | 264 | 266 |
|----------------------|-----|-----|
| Rear Outputs         | •   | •   |
| USB Port             | •   | •   |
| Display Voltage Drop | •   | •   |




SERIES FEATURES



Test Setup Memories



Frequency Selection




Dwell



Safety Agency Listed



PLC Remote



USB (optional)



On the Go Portability



Intuitive User Interface



# 440 SERIES SPECIFICATIONS

## INPUT (446 and 448)

|                  |                                            |                        |
|------------------|--------------------------------------------|------------------------|
| <b>Voltage</b>   | 100 - 120Vac / 200 - 240Vac±10% Auto Range |                        |
| <b>Frequency</b> | 50/60Hz ± 5%                               |                        |
| <b>Fuse</b>      | 446                                        | 10A / 250Vac Slow-Blow |
|                  | 448                                        | 15A / 250Vac Fast-Blow |

## DIELECTRIC WITHSTAND TEST MODE

|                                        |                                                               |                                                                                                                         |
|----------------------------------------|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Output Rating</b>                   | 446                                                           | 5 KV @ 20 mA AC<br>6 KV @ 5 mA DC                                                                                       |
|                                        | 448                                                           | 5 KV @ 99.99 mA AC<br>6 KV @ 10 mA DC                                                                                   |
| <b>Voltage Setting/Display</b>         | Range                                                         | 0 – 5.00 KV AC<br>0 – 6.00 KV DC                                                                                        |
|                                        | Resolution                                                    | 0.01                                                                                                                    |
|                                        | Accuracy                                                      | ± (2% of setting + 5V)                                                                                                  |
| <b>Current Display</b>                 | 446                                                           | Range: 0 - 20.00 mA AC, 0 - 5.00 mA DC<br>Resolution: 0.01 mA<br>Accuracy: ± (2% of reading + 0.02 mA)                  |
|                                        | 448                                                           | Range: 0 - 99.99 mA AC, 0 - 10.00 mA DC<br>Resolution: 0.01 mA<br>Accuracy: ± (2% of reading + 0.06 mA)                 |
| <b>Hi-Limit<br/>Lo-Limit</b>           | 446 AC                                                        | Range: Lo-Limit 0 - 20.00 mA, Hi-Limit 0.10 – 20.00 mA<br>Resolution: 0.01 mA<br>Accuracy: ± (2% of setting + 2 counts) |
|                                        | 446 DC                                                        | Range: Lo-Limit 0 - 5.00 mA, Hi-Limit 0.02 – 5.00 mA<br>Resolution: 0.01 mA<br>Accuracy: ± (2% of setting + 2 counts)   |
|                                        | 448 AC                                                        | Range: Lo-limit 0 - 99.99 mA, Hi-Limit 0.10 – 99.99 mA<br>Resolution: 0.01 mA<br>Accuracy: ± (2% of reading + 6 counts) |
|                                        | 448 DC                                                        | Range: Lo-Limit 0 - 10.00 mA, Hi-Limit 0.02 – 10.00mA<br>Resolution: 0.01 mA<br>Accuracy: ± (2% of reading + 6 counts)  |
| <b>Failure Detector</b>                | Audible and Visual                                            |                                                                                                                         |
| <b>DC Output Ripple</b>                | 446                                                           | <5 % ( 6KV / 5mA at Resistive Load )                                                                                    |
|                                        | 448                                                           | <5 % ( 6KV / 10mA at Resistive Load )                                                                                   |
| <b>Discharge Time</b>                  | 446                                                           | < 50 ms for no load, < 200 ms for capacitor load                                                                        |
|                                        | 448                                                           | < 50 ms for no load, < 100 ms for capacitor load                                                                        |
| <b>Max. Capacitive Load in DC Mode</b> | 1µF < 1KV                                                     | 0.08µF < 4KV                                                                                                            |
|                                        | 0.75µF < 2KV                                                  | 0.04µF < 5KV                                                                                                            |
|                                        | 0.5µF < 3KV                                                   | 0.015uF < 6KV                                                                                                           |
| <b>AC Wave Form</b>                    | Sine Wave, Crest Factor = 1.3 - 1.5 and output voltage > 300V |                                                                                                                         |
| <b>AC Output Frequency</b>             | 50Hz/60Hz ± 0.1%, User Selection                              |                                                                                                                         |

## DIELECTRIC WITHSTAND TEST MODE (Cont.)

|                          |                                                  |                                |
|--------------------------|--------------------------------------------------|--------------------------------|
| <b>Output Regulation</b> | ± (1% of output + 5V), From no load to full load |                                |
| <b>Dwell Timer</b>       | Range:                                           | 0, 0.2 - 60.0 (0=continuous)   |
|                          | Resolution:                                      | 0.1                            |
|                          | Accuracy:                                        | ± (0.1% of setting + 0.05 sec) |
| <b>Ramp Timer</b>        | Range:                                           | 0.2-180.0                      |
|                          | Resolution:                                      | 0.1                            |
|                          | Accuracy:                                        | ± (0.1% of setting + 0.05 sec) |

## INSULATION RESISTANCE TEST MODE

|                                |             |                                        |
|--------------------------------|-------------|----------------------------------------|
| <b>Output Voltage, VDC</b>     | Range:      | 100 - 1000                             |
|                                | Resolution: | 1                                      |
|                                | Accuracy:   | ± (2% of setting + 5V)                 |
| <b>Hi-Limit resistance, MΩ</b> | Range:      | 0, 1 - 1000 (0 = OFF)                  |
|                                | Resolution: | 1                                      |
|                                | Accuracy:   | 100-499V ± (7% of setting + 2 counts)  |
| <b>Lo-Limit resistance, MΩ</b> | Range:      | 1 - 1000                               |
|                                | Resolution: | 1                                      |
|                                | Accuracy:   | 500-1000V ± (3% of setting + 2 counts) |
| <b>Ramp Time, second</b>       | Range:      | 0.1 or 2.0                             |
|                                | Resolution: | 0.1                                    |
|                                | Accuracy:   | ± (0.1% of setting + 0.05 sec)         |
| <b>Delay Time, second</b>      | Range:      | 0, 0.5 - 999.9 (0=continuous)          |
|                                | Resolution: | 0.1                                    |
|                                | Accuracy:   | ± (0.1% of setting + 0.05 sec)         |

Specifications subject to change without notice.

# 440 SERIES SPECIFICATIONS

| GROUND BOND                           |                                                                                                         |                                                            | GENERAL SPECIFICATIONS |                                                                           |                                              |
|---------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------|---------------------------------------------------------------------------|----------------------------------------------|
| <b>Output AC Current, A</b>           | Range:<br>Resolution:<br>Accuracy:                                                                      | 1.0 – 40.0<br>0.1<br>± (2 % of setting + 2 counts)         | <b>Memories</b>        | Allows storage of up to 20 different test programs and a single step mode |                                              |
| <b>Output AC Voltage, V</b>           | 8V(Fixed)                                                                                               |                                                            | <b>Remote I/O</b>      | Input:                                                                    | Test, Reset, Interlock & Recall Memory 1 – 6 |
| <b>Output Frequency, Hz</b>           | 50Hz/60Hz ± 0.1%, User Selectable                                                                       |                                                            |                        | Output:                                                                   | Pass, Fail, Test-in-Process                  |
| <b>Maximum Loading</b>                | 1.0–10.0A/0–600mΩ, 10.1–30.0A/0–200mΩ, 30.1–40.0A/0–150mΩ                                               |                                                            | <b>Interface</b>       | USB (Optional)                                                            |                                              |
| <b>Offset, mΩ</b>                     | Range:<br>Resolution:<br>Accuracy:                                                                      | 0-100<br>1<br>± (2 % of setting + 2 counts)                | <b>Security</b>        | Lockout capability to avoid unauthorized access to test set-up programs   |                                              |
| <b>HI and LO-Limit Resistance, mΩ</b> | Range:<br>Resolution:<br>Accuracy:                                                                      | 0 – 150 (30.1-40.0A)<br>1<br>± (2 % of setting + 2 counts) | <b>Calibration</b>     | Software and adjustments made through the front panel                     |                                              |
|                                       | Range:<br>Resolution:<br>Accuracy:                                                                      | 0 – 200 (10.1-30.0A)<br>1<br>± (2 % of setting + 2 counts) | <b>Dimension</b>       | 446                                                                       | 280mm(W) x 89mm(H) x 400 mm(D)               |
|                                       | Range:<br>Resolution:<br>Accuracy:                                                                      | 0 – 600 (1.0-10.0A)<br>1<br>± (2 % of setting + 2 counts)  |                        | 448                                                                       | 430mm(W) x 132mm(H) x 400 mm(D)              |
| <b>Fix Ramp Timer, second</b>         | Range:<br>Resolution:<br>Accuracy:                                                                      | 0.4<br>0.1<br>± 0.05 sec                                   | <b>Weight</b>          | 446                                                                       | 18lbs (8kg)                                  |
|                                       | 0-250mΩ = 0.1sec ramp up<br>251-300mΩ = 0.2sec ramp up<br>301-450mΩ = 0.3sec ramp up<br>>450mΩ = 0.4sec |                                                            |                        | 448                                                                       | 53lbs (24kg)                                 |
| <b>Dwell Timer, second</b>            | Range:<br>Resolution:<br>Accuracy:                                                                      | 0, 0.1 - 240.0 (0 = continuous)<br>0.1<br>± 0.05 sec       |                        |                                                                           |                                              |

Specifications subject to change without notice.

# 290 SERIES SPECIFICATIONS

| INPUT (294, 295, 296, 297, 298) |                                                       |                                                                                |
|---------------------------------|-------------------------------------------------------|--------------------------------------------------------------------------------|
| Voltage                         | 100-120 VAC / 200-240 VAC ± 10% Auto Range            |                                                                                |
| Frequency                       | 50/60 Hz ± 5%                                         |                                                                                |
| Fuse                            | 3.15 A / 250 VAC Fast-Blow                            |                                                                                |
| DIELECTRIC WITHSTAND TEST MODE  |                                                       |                                                                                |
| Output Rating                   | 298                                                   | AC 0-5.00 kVAC, 99.99 mA                                                       |
|                                 | 297                                                   | AC 0-5.00 kVAC, 12.00 mA<br>DC 0-6.00 kVDC, 5.00 mA                            |
|                                 | 296                                                   | AC 0-5.00 kVAC, 12.00 mA<br>DC 0-6.00 kVDC, 5.00 mA                            |
|                                 | 295                                                   | AC 0-5.00 kVAC, 12.00 mA                                                       |
|                                 | 294                                                   | DC 0-6.00 kVDC, 5.00 mA                                                        |
| Voltage Setting                 | 298                                                   | 0-5.00 kVAC                                                                    |
|                                 | 297                                                   | Resolution: 0.01 kV                                                            |
|                                 | 296                                                   | Accuracy: ± (1.5% of setting + 5V)                                             |
|                                 | 295                                                   |                                                                                |
|                                 | 297                                                   | 0-6.00 kVDC                                                                    |
|                                 | 296                                                   | Resolution: 0.01 kV                                                            |
|                                 | 294                                                   | Accuracy: ± (1.5% of setting + 5V)                                             |
| Output Frequency                | 294                                                   | DC only                                                                        |
|                                 | 295, 298                                              | 50/60 Hz Selectable                                                            |
|                                 | 296, 297                                              | DC and 50/60 Hz Selectable                                                     |
|                                 | Accuracy                                              | ± 0.1%                                                                         |
| AC Waveform                     | Sine Wave, Crest Factor = 1.3 - 1.5                   |                                                                                |
| DC Output Ripple                | 294                                                   | <5% ( 6 kVDC / 5mA at Resistive Load)                                          |
|                                 | 296                                                   |                                                                                |
|                                 | 297                                                   |                                                                                |
| Dwell Timer                     | 0, 0.2 - 60 sec, (0=continuous), 0.1 sec/step         |                                                                                |
| Ramp Timer                      | 0.2 - 180 sec, 0.1 sec/step                           |                                                                                |
| Leakage Failure Settings        | 298                                                   | AC Hi-Limit: 0.10 - 99.99 mA<br>Lo-Limit: 0 - 99.99 mA                         |
|                                 | Resolution:                                           | 0.01 mA                                                                        |
|                                 | Accuracy:                                             | ± (2% of reading + 0.06 mA)                                                    |
|                                 | 297                                                   | AC Hi-Limit: 0.10 - 12.00 mA                                                   |
|                                 | 296                                                   | Lo-Limit: 0 - 12.00 mA<br>DC Hi-Limit: 0.02 - 5.00 mA<br>Lo-Limit: 0 - 5.00 mA |
|                                 | 295                                                   | AC Hi-Limit: 0.10 - 12.00 mA<br>Lo-Limit: 0 - 12.00 mA                         |
|                                 | 294                                                   | DC Hi-Limit: 0.02 - 5.0 mA<br>Lo-Limit: 0 - 5.00 mA                            |
|                                 | Resolution:                                           | 0.01 mA                                                                        |
|                                 | Accuracy:                                             | ± (2% of reading + 0.02 mA)                                                    |
| Discharge Time                  | < 50 msec for no load, < 100 msec for capacitive load |                                                                                |

| INSULATION RESISTANCE TEST MODE (297 only) |                                                                                                                                   |                                                                                                                                            |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Output Voltage                             | Range:                                                                                                                            | 0.1-1.00 kVDC                                                                                                                              |
|                                            | Resolution:                                                                                                                       | 0.01 kV                                                                                                                                    |
|                                            | Accuracy:                                                                                                                         | ± (1.5% of setting + 3 V)                                                                                                                  |
| Resistance Display                         | Range:                                                                                                                            | 1 - 1000 MΩ                                                                                                                                |
|                                            | Resolution:                                                                                                                       | 1 MΩ                                                                                                                                       |
|                                            | Accuracy:                                                                                                                         | 100-499 V ± (7% of setting + 2 MΩ)<br>500-1000 V ± (3% of setting + 2 MΩ)                                                                  |
| Hi-Limit                                   | Range:                                                                                                                            | 0.1 - 1000 MΩ (0=off)                                                                                                                      |
|                                            | Resolution:                                                                                                                       | 1 MΩ                                                                                                                                       |
| Lo-Limit                                   | Range:                                                                                                                            | 1 - 1000 MΩ                                                                                                                                |
|                                            | Resolution:                                                                                                                       | 1 MΩ                                                                                                                                       |
| Timer                                      | Ramp:                                                                                                                             | 0.1 or 2.0 sec                                                                                                                             |
|                                            | Delay:                                                                                                                            | 0, 0.5 - 999.9 sec, (0=continuous)                                                                                                         |
| GENERAL SPECIFICATIONS                     |                                                                                                                                   |                                                                                                                                            |
| Continuity Feature                         | Range:                                                                                                                            | 0.0 - 1.50 Ω                                                                                                                               |
|                                            | Resolution:                                                                                                                       | 0.01 Ω                                                                                                                                     |
|                                            | Accuracy:                                                                                                                         | ± (2% of setting + 0.02 Ω)                                                                                                                 |
| Memories                                   | 5 (10 optional)                                                                                                                   |                                                                                                                                            |
| Remote I/O                                 | Input:                                                                                                                            | Test, Reset, Interlock                                                                                                                     |
|                                            | Output:                                                                                                                           | Pass, Fail, Test-in-Process<br><u>Hardware Interlock - a relay on the high voltage output opens when the Interlock signal is disabled.</u> |
| 3mA AC/DC Current Limit (optional)         | 294                                                                                                                               | Range: 0.00 - 3.00 mA                                                                                                                      |
|                                            | 295                                                                                                                               | Resolution: 0.01 mA                                                                                                                        |
|                                            | 296                                                                                                                               | Accuracy: ± (2% of setting + 0.02mA)                                                                                                       |
|                                            | 297                                                                                                                               |                                                                                                                                            |
|                                            |                                                                                                                                   |                                                                                                                                            |
| Meter Max (standard)                       | Displays the maximum voltage value recorded during a breakdown.                                                                   |                                                                                                                                            |
| Imax (optional)                            | Displays the maximum leakage current value read during a test. Option 3 (USB port) must be installed to receive this measurement. |                                                                                                                                            |
| Security                                   | Option to turn On or Off, when On you can switch between two security levels:                                                     |                                                                                                                                            |
|                                            | 1. Run - Operator can only run a test. No ability to change memory locations or edit test parameters.                             |                                                                                                                                            |
|                                            | 2. Mem - Operator can run a test and change memory locations. No ability to edit test parameters.                                 |                                                                                                                                            |
| Safety Mark                                | CE/cTUVus                                                                                                                         |                                                                                                                                            |
| Dimensions (W x H x D)                     | 294, 295                                                                                                                          | 8.5" x 3.5" x 11.9" (215 x 88.1 x 300 mm)                                                                                                  |
|                                            | 296, 297                                                                                                                          |                                                                                                                                            |
|                                            | 298                                                                                                                               | 16.93" x 5.20" x 11.84" (430 x 132 x 300 mm)                                                                                               |
| Weight                                     | 294, 295                                                                                                                          | 12 lbs (5.46 Kg)                                                                                                                           |
|                                            | 296, 297                                                                                                                          |                                                                                                                                            |
|                                            | 298                                                                                                                               | 46 lbs (20.86 Kg)                                                                                                                          |

Specifications subject to change without notice.

# 260 SERIES SPECIFICATIONS

| INPUT     |                   |                                                    |
|-----------|-------------------|----------------------------------------------------|
| Voltage   | 264               | 100 - 120 VAC / 200 - 240 VAC $\pm$ 10% Auto Range |
|           | 266               | 100 - 240 VAC $\pm$ 10% Full Range                 |
| Frequency | 50/60 Hz $\pm$ 5% |                                                    |
| Fuse      | 264               | 10A / 250 VAC Slow-Blow                            |
|           | 266               | 12A / 250 VAC Slow-Blow                            |

| GROUND BOND TEST MODE     |                                                                                                                                                 |                                                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Output Rating             | 264                                                                                                                                             | 3.0 - 40.0 AAC                                                                                                      |
|                           | 266                                                                                                                                             | 3.0 - 60.0 AAC                                                                                                      |
|                           | Resolution: 0.1 A                                                                                                                               |                                                                                                                     |
|                           | Accuracy: $\pm$ (2% of setting + 0.1A)                                                                                                          |                                                                                                                     |
|                           | 264                                                                                                                                             | Voltage 8 VAC (fixed)                                                                                               |
|                           | 266                                                                                                                                             | Voltage 12 VAC (fixed)                                                                                              |
| Output Frequency          | 50/60 Hz user selectable<br>Accuracy: $\pm$ 0.1%                                                                                                |                                                                                                                     |
| Resistance Limit Settings | 264                                                                                                                                             | 0 - 150 m $\Omega$ for 30.1 - 40.0 A<br>0 - 200 m $\Omega$ for 10.1 - 30.0 A<br>0 - 600 m $\Omega$ for 3.0 - 10.0 A |
|                           | 266                                                                                                                                             | 0 - 150 m $\Omega$ for 30.1 - 60.0 A<br>0 - 200 m $\Omega$ for 15.1 - 30.0 A<br>0 - 600 m $\Omega$ for 3.0 - 15.0 A |
|                           | Resolution: 1 m $\Omega$                                                                                                                        |                                                                                                                     |
|                           | Accuracy: $\pm$ (2% of setting + 2 m $\Omega$ )                                                                                                 |                                                                                                                     |
| Offset Limit Settings     | 0 - 100 m $\Omega$<br>Resolution: 1 m $\Omega$<br>Accuracy: $\pm$ (2% of setting + 2 m $\Omega$ )                                               |                                                                                                                     |
| Dwell Timer               | 0, 0.5 - 240.0 sec, (0=continuous), 0.1 sec/step                                                                                                |                                                                                                                     |
| Ramp Timer                | 0.1 sec fixed                                                                                                                                   |                                                                                                                     |
| Measurement Current       | 264                                                                                                                                             | 0.0 - 40.0 AAC                                                                                                      |
|                           | 266                                                                                                                                             | 0.0 - 60.0 AAC                                                                                                      |
|                           | Resolution: 0.1 A<br>Accuracy: $\pm$ (3% of reading + 0.1 A)                                                                                    |                                                                                                                     |
| Ohmmeter                  | 264                                                                                                                                             | 0 - 600 m $\Omega$                                                                                                  |
|                           | Resolution: 1 m $\Omega$<br>Accuracy: $\pm$ (3% of reading + 3 m $\Omega$ ) for 3 - 5.9 A,<br>$\pm$ (2% of reading + 2 counts) for 6 - 40A      |                                                                                                                     |
|                           | 266                                                                                                                                             | 0 - 600 m $\Omega$                                                                                                  |
|                           | Resolution: 1 m $\Omega$<br>Accuracy: $\pm$ (3% of reading + 3 m $\Omega$ ) for 3 - 5.9 A<br>$\pm$ (2% of reading + 2 m $\Omega$ ) for 6 - 60 A |                                                                                                                     |

| GENERAL SPECIFICATIONS          |                                                                                                                                                                                                                                                                                                     |                                              |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| Memories                        | 5                                                                                                                                                                                                                                                                                                   |                                              |
| Remote I/O                      | Input:                                                                                                                                                                                                                                                                                              | Test, Reset, Interlock                       |
|                                 | Output:                                                                                                                                                                                                                                                                                             | Pass, Fail, Test-in-Process                  |
|                                 | <u>Hardware Interlock - a relay on the high voltage output opens when the interlock signal is disabled.</u>                                                                                                                                                                                         |                                              |
| Voltage Drop Display (optional) | Display the voltage drop across the circuit instead of the resistance measurement.                                                                                                                                                                                                                  |                                              |
| Voltage Limit Settings          | 264                                                                                                                                                                                                                                                                                                 | 0.00 - 6.00 VAC                              |
|                                 | 266                                                                                                                                                                                                                                                                                                 | 0.00 - 9.00 VAC                              |
|                                 | Resolution: 0.01 V<br>Accuracy: $\pm$ (2% of setting + 0.02 V)                                                                                                                                                                                                                                      |                                              |
| Offset Limit Settings           | 264                                                                                                                                                                                                                                                                                                 | 0.00 - 4.00 VAC                              |
|                                 | 266                                                                                                                                                                                                                                                                                                 | 0.00 - 6.00 VAC                              |
|                                 | Resolution: 0.01 V<br>Accuracy: $\pm$ (2% of setting + 0.02 V)                                                                                                                                                                                                                                      |                                              |
| Security                        | Option to turn On or Off, when On you can switch between two security levels:<br><br>1. Run - Operator can only run a test. No ability to change memory locations or edit test parameters.<br><br>2. Mem - Operator can run a test and change memory locations. No ability to edit test parameters. |                                              |
| Safety Mark                     | CE/cTUVus                                                                                                                                                                                                                                                                                           |                                              |
| Dimensions (W x H x D)          | 264                                                                                                                                                                                                                                                                                                 | 8.5" x 3.5" x 11.81" (215 x 88 x 300 mm)     |
|                                 | 266                                                                                                                                                                                                                                                                                                 | 16.93" x 5.20" x 11.81" (430 x 132 x 300 mm) |
| Weight                          | 264                                                                                                                                                                                                                                                                                                 | 9.25 lbs. (4.3 Kg)                           |
|                                 | 266                                                                                                                                                                                                                                                                                                 | 20.25 lbs. (9 Kg)                            |

Specifications subject to change without notice.

# ICONOGRAPHY




AC Hipot

The AC Hipot test is used to stress the insulation of a DUT with AC high voltage.



500 VA

Output up to 100 mA of current during an AC Hipot test.




USB

Connect your tester to a PC for automated applications with optional USB control.



DC Hipot

The DC Hipot test is used to stress the insulation of a DUT with DC high voltage.



Test Setup Memories

Quickly setup, edit and recall test settings for different types of DUTs with multiple user-defined memory locations.



PLC Remote

Maximize operator safety by connecting an enclosure, warning lights, or safety probes to your tester.



Ground Bond

The Ground Bond test is used to verify the integrity of a DUT's earth ground conductor.



Frequency Selection

Get your products ready for the global market by testing at 50 or 60 Hz.




On the Go Portability

Denotes a tester designed for optimal portability. Perfect for use in the field.



Ground Continuity Check

The Ground Continuity test is used to verify the presence of the DUT's earth ground conductor.



Ramp

Prevents false failures by slowly ramping up the output voltage over time – perfect for sensitive or highly capacitive DUTs.




Low Current Sense

Prevents false Hipot passes with confidence by ensuring your test leads are connected correctly.



Insulation Resistance

The Insulation Resistance test is used to determine the total resistance of a DUT's insulation.



Dwell

Eliminates the need to make adjustments during testing by consistently applying the correct voltage for the correct amount of time.



Safety Agency Listed


This tester is NRTL listed and was subjected to the same rigorous tests it must perform.

# SAFETY STANDARD REFERENCE CHART

| Standard / Harmonized Standard                                                                                         | Testing Type | Dielectric Withstand                           |              |                           | Ground Bond/Continuity |                  |                          |             | Earth Leakage  |               | Insulation Resistance |         |        | Suggested Model #  |
|------------------------------------------------------------------------------------------------------------------------|--------------|------------------------------------------------|--------------|---------------------------|------------------------|------------------|--------------------------|-------------|----------------|---------------|-----------------------|---------|--------|--------------------|
|                                                                                                                        |              | Test Voltage                                   | Max I.       | Test Time                 | Test Current           | V Limit          | Max. R                   | Test Time   | Test Voltage   | Max I.        | Test Time             | V Limit | Min R  |                    |
| H.U.D. Specification #24 CFR 3280.810                                                                                  | Performance  | 900-1079 VAC or 1273-1526 VDC                  | No Breakdown | 60 s                      | Continuity             |                  |                          |             | N/A            |               | N/A                   |         |        | 294, 295, 296, 297 |
|                                                                                                                        | Production   | 1080-1250 VAC or 1527-1768 VDC                 | No Breakdown | 1 s                       | Continuity             |                  |                          |             | N/A            |               | N/A                   |         |        | 294, 295, 296, 297 |
| R.V.I.A. (NEC)                                                                                                         | Performance  | 900 VAC or 1280 VDC                            | No Breakdown | 60 s                      | Continuity             |                  |                          |             | N/A            |               | N/A                   |         |        | 294, 295, 296, 297 |
|                                                                                                                        | Production   | 1080 VAC or 1530 VDC                           | No Breakdown | 1 s                       | Continuity             |                  |                          |             | N/A            |               | N/A                   |         |        | 294, 295, 296, 297 |
| IEC 60335-1 / GB 4706.1 Household Electrical Appliances                                                                | Performance  | 500 – 2400 VAC x rated V + 2400 VAC            | No Breakdown | 60 s                      | ≥ 10 A                 | ≤ 12 V           | 0.1 – 0.2 Ω              | ≤ 120 s     | 1.06 x rated V | 0.25 – 5.0 uA | N/A                   |         |        | 298*               |
| UL 60335-1 Household Electrical Appliances                                                                             | Performance  | 500 V – 2400 VAC x rated V + 2400 VAC          | No Breakdown | 60 s                      | 40 A                   | ≤ 6.5 V          | ≤ 0.5 Ω                  | 120 s       | 1.06 x rated V | 0.25 – 5.0 uA | N/A                   |         |        | 298*               |
| IEC 60598-1 / GB 7000.1 Luminaires                                                                                     | Performance  | 500 – 4 x rated V + 2000 VAC                   | No Breakdown | 60 s                      | ≥ 10 A                 | ≤ 12 V           | ≤ 0.5 Ω                  | 60 s        | Rated V        | 0.5 – 10 mA   | 60 s                  | 500 VDC | 1-4 MΩ | 298*               |
|                                                                                                                        | Production   | Not Specified - Responsibility of Manufacturer |              |                           |                        |                  |                          |             |                |               |                       |         |        | 294, 295, 296, 297 |
| UL 1598 Luminaires                                                                                                     | Production   | 1200 VAC                                       | No Breakdown | 1 s                       | Continuity             |                  | ≤ 0.1 Ω                  | Continuity  | N/A            |               | N/A                   |         |        | 295                |
| IEC/UL 61010-1 / CSA 22.2 No. 61010-1 / GB 4793.1 Laboratory Control Test & Measurement Equipment                      | Performance  | 840 - 11940 VAC or 1200 - 7500 VDC             | No Breakdown | 5 - 60 s                  | 25 or 30 A             | ≤ 10 V or ≤ 12 V | ≤ 0.1 Ω or < 4 V 0.133 Ω | 60 or 120 s | < 300 V        | 0.5 mA        | N/A                   |         |        | 298*               |
|                                                                                                                        | Production   |                                                |              | 5 s max ramp up 2 s dwell | Continuity             |                  |                          |             | N/A            |               | N/A                   |         |        | 294, 295, 296, 297 |
| UL 45A Portable Electrical Appliances                                                                                  | Production   | 1000 - 3000 VAC                                | No Breakdown | 1 s                       | Continuity             |                  |                          |             | N/A            |               | N/A                   |         |        | 294, 295           |
| UL 60950-1 CSA 22.2 No. 60950-1 / IEC 62368-1 / GB 4943.1 Audi/Video, Information & Communication Technology Equipment | Production   | 1000 – 3000 VAC or 1414 – 4242 VDC             | No Breakdown | 1 – 6 s                   | Continuity             |                  |                          |             | N/A            |               | N/A                   |         |        | 294, 295, 296      |

\* This standard requires the use of a 500VA Hipot Tester

# SAFE WORKSTATION

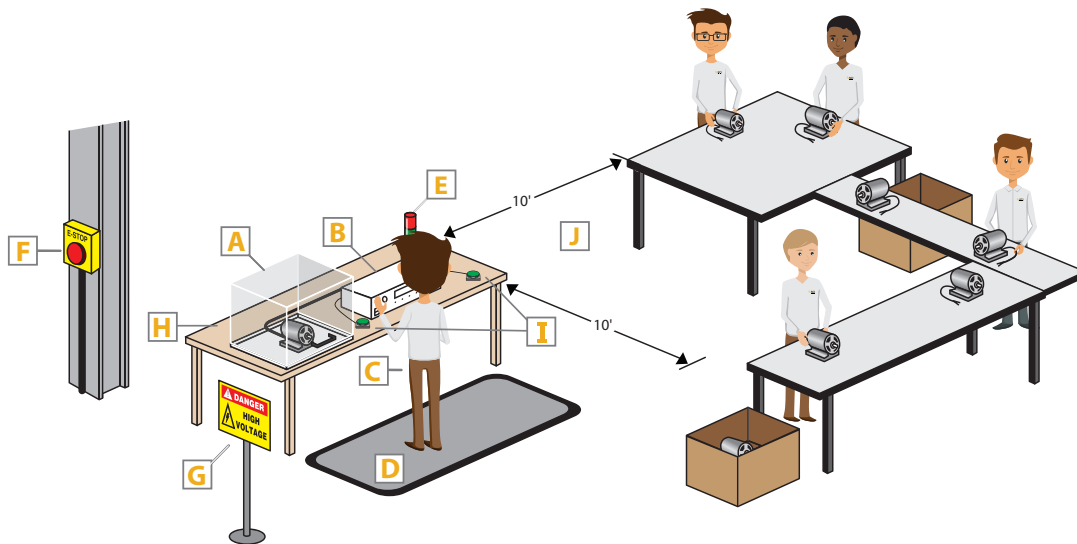

One of the best ways to prevent injury is to ensure that your test station is set up safely and securely. Test stations can be setup with or without direct protection depending on your requirements. Direct protection means that the operator cannot physically come into contact with an energized DUT while a test is running. This safe workstation diagram uses a Hipot tester as an example to illustrate how our protective equipment can be used to keep operators safe.

**A**

## DUT Safety Enclosure

This is wired to the Hipot tester's Remote Safety Interlock. This protects you from touching the DUT while a test is in progress. If the enclosure door is opened, the tester's high voltage is immediately disabled.

**E**

## Signal Tower Light 24V

Gives an indication as to the status of the testing area.

**H**

## Non-Conductive Work Bench

Only use a work bench made of non-conductive material such as plastic or wood. This ensures no stray leakage current could flow through you during a test.

**B**

## Hipot Tester

Tester used to test the DUT.

**F**

## Emergency Stop Button

Located on the perimeter of the test area. In the event of an emergency, someone outside the test area can hit the E-Stop button to immediately cut off power to the entire test station.

**I**

## Dual Palm Remote Switches

Two hand operation switches force the operator to place a hand on each switch and hold them throughout the test. The palm switches should be placed at least 21.6" (550mm) apart to prevent the operator from one hand activation of both switches.

**C**

## Test Operator

**G**

## Warning Sign

Mark the testing area with a clearly posted sign that reads: DANGER - HIGH VOLTAGE TEST AREA. AUTHORIZED PERSONNEL ONLY.

**J**

## NEC (National Electric Code) & NFPA (National Fire Protection Agency)

Stipulate that any unqualified workers shall not come within 10' of an EXPOSED energized circuit.

**D**

## Insulation Mat

This isolates you from ground which provides an additional means of protection when operating high voltage equipment.

# PPE ACCESSORIES

## IMPROVE WORKSTATION SAFETY WITH PPE

Our Personal Protective Equipment improves workstation safety, warns unqualified operators of a dangerous testing area, and safeguards operators from electric shock. OSHA 1910 Subpart S requires, by law, that employers provide their employees with working conditions free of known hazards. We'll help you provide your employees with all necessary PPE.

D



### CLASS 3 INSULATION MAT 40396

This class 3 electrical insulation mat is an ideal means for adding a level of operator safety. The mat isolates the operator from ground while testing, which greatly mitigates the shock hazard.

Thickness: 3/8" (9.53 mm)      Dimensions: 3' x 3' (91.44 x 91.44 cm)

G



### HIGH VOLTAGE WARNING SIGN 39538

This "DANGER: HIGH VOLTAGE TEST AREA" sign is ideal for warning unauthorized operators to stay away from the test area. This sign should be clearly visible and mounted outside of the electrical testing area.

E



### SIGNAL TOWER LIGHT 24V 40417

Our Signal tower light gives operators a visual indication of the status of the testing area. A green light indicates the Hipot tester is not outputting high voltage and the test area is safe. A red light indicates that the Hipot tester is active and to stay clear of the test area.

Compatible Models:  
290 Series, 260 Series, and 440 Series

A



### DUT ENCLOSURE 39067

Our DUT Enclosures are designed to protect the operator from electric shock during testing. Interface an enclosure with our Remote Safety Interlock feature to automatically disable the instrument's output when the enclosure door is opened.

Outside dimensions (W x D x H):  
24" x 19" x 11.5" (610 x 483 x 293 mm)

Inside dimensions (W x D x H):  
20" x 16" x 10" (508 x 407 x 254 mm) 3/4" Walls,  
3/4" Flame Retardant Foam  
1/4" Plexiglass cover

F



### EMERGENCY STOP SWITCH ESTOP

The E-Stop trigger will immediately stop the flow of electric current to your SCI tester when pressed, preventing operator injury or damage to a device under test.

Compatible Models: 290 Series,  
260 Series, and 440 Series




### REMOTE TRIGGER FOOT SWITCH 40492

Allows for remote operation of electrical safety tests while a safe distance is maintained between the operator and test instrument.

Compatible Models: All testers

I

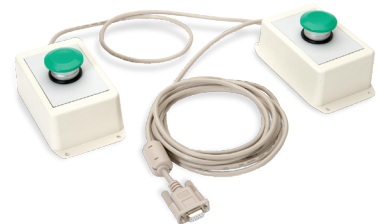

### DUAL PALM REMOTE SWITCHES DPR-01

Using two-hand operation switches ensures operator safety because it forces you to place a hand on each switch and hold throughout the test. This prevents you from accidentally touching a DUT while the test is running. The palm switches should be placed at least 21.6" (550mm) apart to prevent one-hand activation of both switches.

Compatible Models: 290 Series and 440 Series

# PPE ACCESSORIES



## REMOTE TEST BOX (RTB)

The RTB is a Remote Test and Reset Control Box. It comes in two different configurations: RTB-01 and RTB-02. Both models utilize the connection of Remote Input/Output on the back of all compatible SCI testers and can be used to initiate and reset a test. The RTB-02 has an additional feature (LEDs) which allow the operator to monitor the PASS, FAIL and PROCESSING signals.

RTB-01 Compatible Models: 260 Series, 290 Series, 440 Series, 1300 Series, 2205, 2503, 2510, 2550, 4320, 4520, 6330

RTB-02 Compatible Models: 290 Series, 260 Series, 440 Series, 2525, 4320, 4520, 6330



## HIGH VOLTAGE RETRACTABLE PROBE 6FT (1.8M)

38081

The simple-to-use high voltage retractable probe gives operators the ability to press to activate the retractable probe tip.

Compatible Models: All Hipots




## RETURN RETRACTABLE PROBE 6FT (1.8M)

38082

Our return retractable probe allows for safe contact to ground points of a DUT. The trigger style is ergonomically comfortable for daily use.

Compatible Models: 290 Series



## DUAL ACTION TRIGGER TEST PROBE 10 FT. (3m)

38814

This high voltage test gun has a dual action test trigger that controls the retractable probe tip and activates the high voltage output of the tester. The unique ergonomic shape makes this probe easy and comfortable to use.

Compatible Models: 290 Series



## 40 AMP HIGH CURRENT PROBE W/ LUG 10 FT. (3m)

38539

This fixed tip probe allows for easy contact with the grounding points of the DUT. The probe has two separate test buttons making it comfortable to use in various positions. The test switch can be used to activate high current after making good contact with the test point.

Compatible Models: 264

# ACCESSORIES

## TESTER VERIFICATION

Nationally Recognized Testing Laboratories (NRTLs) require minimums for in-service checks of electrical safety testers. In-service checks are designed to verify the measurement accuracy of the test equipment. These verification checks must accurately detect a pass and failure condition to ensure electrical safety testers are functioning properly. NRTLs require verification testing to be performed daily.



## TEST VERIFICATION BOX

Our test verification box solutions are a go / no-go daily test verification designed to ensure that the failure detectors of an SCI electrical safety tester are functioning properly. These boxes were designed to verify AC and DC Hipot test functionality (the TVB-2 also has Ground Bond test functionality), making it the ideal solution for manufacturers who are required to conduct daily verifications on their test equipment.

TVB-1 Compatible Models: All Testers

TVB-2 Compatible Models: All Testers

### PASS/FAIL VERIFICATION



## 120 kΩ RESISTOR

P/N: 35445

Use the 120 kΩ resistor for Hipot failure verification. It can also be used to establish a Hipot trip current/failure point.

Compatible Models: All Testers

### FAIL VERIFICATION

## ADAPTER BOX

An adapter box allows for safe and easy testing of line cord-terminated products. Simply connect the adapter box to the tester and then plug the DUT into the adapter box. Adapter boxes are available for most test instruments in multiple country configurations.


| Part Number | Name                               | Compatible With |
|-------------|------------------------------------|-----------------|
| 36544       | Universal US - 10FT                | 290 Series      |
| 36541       | Universal US - HV, HC - 10FT       | 264             |
| 40400       | Universal US - HV, HC 40Amp - 10FT | 440 Series      |






Record, track and store your data with our brand new software as a service.


Compatible with the Associated Research Hypot® Series, Hypot-ULTRA® Series, OMNIA® II Series (including OMNIA models 8206 or 8256 with the eec 8500 Series), HYAMP® Series, HypotMAX® Series, LINECHEK® II, and SC6540. Also compatible with SCI's 290 Series, 260 Series, and 440 Series.

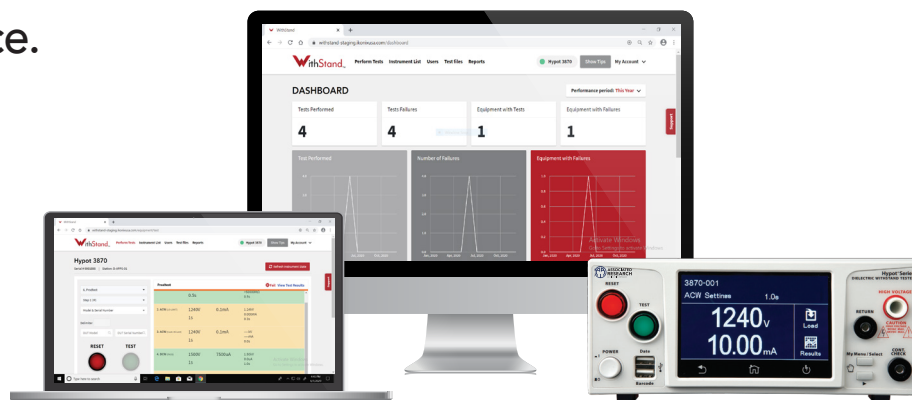

- Unlimited Users
- Remote Instrument Connection
- Barcode Connection
- Multi-language Support
- Intuitive User Interface
- Cloud / Local Storage
- Auto-File Loading

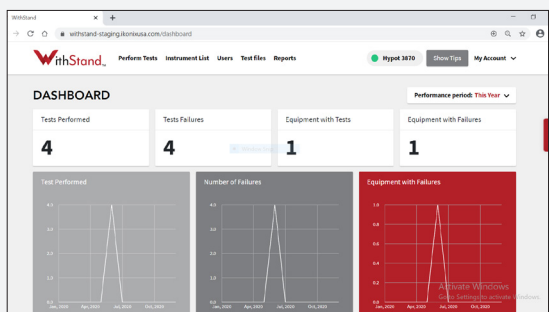

The platform's interface introduces an intuitive user experience making it easy to setup, run tests and view your reports.

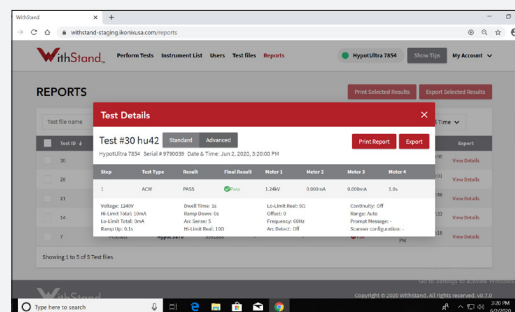

Cloud storage ensures that your tests and data will never be lost or altered – all information is stored immediately to the cloud for access at any time.

► Try it out for yourself with a free 30-day trial [withstand.ikonixusa.com/auth/signup/create](https://withstand.ikonixusa.com/auth/signup/create)

# APPLICATIONS CONSULTING

Applications Consulting provides customized training tailored to your specific company needs.



## OUR CONSULTING PACKAGES

### Digital Packages

A web-based learning program. Choose from 2 packages; our Consulting on Demand or Customized Digital Package.

### On-site Training Package

1-4 day on-site, hands-on training for your production line or R&D lab.

### On-site Validation Package

2 or 4 day on-site training to completely satisfy your organization's validation needs.

\*APAC Region Availability: Digital Packages and 1-Day On-site Training Program.

Visit [konixasia.com/consulting](https://www.konixasia.com/consulting) to learn how we can help your team  
WE WILL HELP MAKE SURE YOUR SYSTEM IS SAFE AND EFFECTIVE



Ikonix has developed a comprehensive solution that not only provides top-quality, precise instruments but also ensures swift calibration, guaranteeing instrument accuracy and precision throughout its service life. Ikonix's calibration service is available in two types: ISO Calibration and Standard Calibration. We recommend Associated Research, SCI Electric Safety Tester, and EEC AC Power Source be returned annually for calibration and inspection at our A2LA Accredited ISO 17025 Calibration Lab.

## Calibration Benefits

**Rapid Turnaround:** Fast 5-business-day calibration. If the instrument requires repair during the calibration process, the 5-business-day period will restart, covering both repair and calibration.

**Cost Saving:** Our one-stop service for verification, calibration, and adjustment eliminates the need to send instruments back and forth between the calibration lab and the original manufacturer for recalibration.

**Traceability and Accuracy :** We provide certification ensuring that calibration, measurements, and adjustments are not only accurate but traceable to a National Institute of Standards and Technology (NIST).

**Full-Scope Calibration:** Our calibration is conducted based on Associated Research, SCI Electric Safety Tester, and EEC AC Power Source specification scope, ensuring a thorough calibration and adjustment across all measurement ranges, rather than merely calibrating a few basic points.

**Extended Warranty:** Annual calibration with Ikonix qualifies your Associated Research, EEC, and SCI branded products for an additional year of coverage beyond the original 5-year warranty\* through the extended warranty program. This program also extends coverage for 5 years beyond the instrument's discontinuation date.

\*APAC-only products come with a 2-year warranty. The extended warranty does not apply to EEC electrical safety testers sold before 2023. For further details, please contact our sales team.

## Types of Calibration

### ISO Calibration

Accredited calibrations provide measurement data and uncertainty traceable to the NIST. The Ikonix ISO 17025 calibration laboratory is accredited by the A2LA, and its reports are highly recognized internationally, making them vital to multinational companies and export-oriented industries. If an auditor visits your facility, you can present this calibration to them.

### Standard Calibration

Standard Calibration is our base calibration type and provides a certificate stating that Associated Research, EEC, and SCI branded products are calibrated using standards traceable to the NIST.





28105 N. Keith Drive  
Lake Forest, IL 60045 USA  
+1-847-367-4077  
+1-847-367-4080  
info@ikonixusa.com  
[www.ikonixusa.com](http://www.ikonixusa.com)

### Ikonix Taiwan

7 F, No. 95, Sec. 1, Xintai 5th Rd., Xizhi  
Dist., New Taipei City 221, Taiwan  
**Telephone** +886-2-21653066  
**Fax** +886-2-21653077  
**Email** contact@ikonixasia.com  
[www.ikonixasia.com](http://www.ikonixasia.com)

### Ikonix Asia

Unit D3-5-2 (2ND Floor) Block D3, Dana  
1 Commercial Centre, Jalan PJU 1A/46,  
47301 Petaling Jaya, Selangor, Malaysia  
**Telephone** +60-3-78429168  
**Fax** +60-3-78426168  
**Email** contact@ikonixasia.com  
[www.ikonixasia.com](http://www.ikonixasia.com)

## Testers For Electrical Safety Compliance

